




Noahgates

珞亚科技

National High-Tech Enterprise | Specialized And New Enterprises

Manufacturer Of Access Gates And Parking Lot Management Equipment

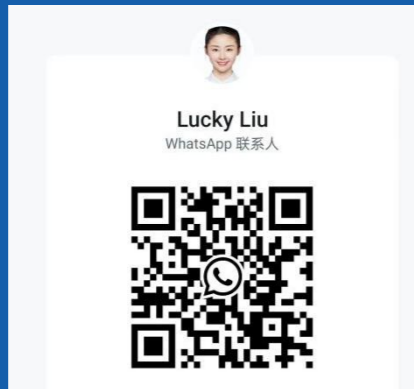

Noah Technology Co., Ltd

TEL: 0086 131 6836 6292

Web: www.noahgates.com

E-mail: luckyliu@noahgates.com

ADD: Noah Industrial Park, Guanlan Street, Longhua, Shenzhen, Guang Dong, China .





Brand Concept Show

Noah Strong Power

Continuing our consistent quality awareness and continuous research in product quality and environmental protection, Noah series of products have passed relevant quality certifications and are internationally recognized in product indicators. Noah continuously invests in technology and equipment based on the actual situation of the enterprise, ensuring that Noah products can smoothly enter the international market while passing through the domestic market .



Brand About Us

Shenzhen Noah Technology Co., Ltd. is a specialized new enterprise and high-tech enterprise focusing on the research and development, production, sales and service of intelligent security equipment. The company was founded in 2005 and is located in Shenzhen City, covering an area of 10,000 square meters. It has its own R&D, production, sales and service teams, and has many branches and service centers across the country. Its products are exported to the world and have won praise from domestic and foreign customers. unanimously praised.

Shenzhen Noah Technology is committed to providing customers with various intelligent security solutions. Through technological innovation, excellent quality and excellent service, it has won high recognition from the market and customers. Our company's main product series include: intelligent pedestrian passage systems, unattended parking lot cloud platform solutions, access control and attendance systems, scenic spot ticketing systems, school push systems, college dormitory management platforms, etc.

Shenzhen Noah access Technology focuses on technological innovation, has independent research and development and production capabilities, and maintains close technical cooperation relationships with domestic technology companies. The company's R&D department adheres to the principle of "technology leadership, quality assurance" and continuously launches innovative and practical new products to meet the personalized needs of users.

After years of hard work, Noah access Technology has been awarded the title of Specialized New Enterprise and National High-tech Enterprise. It also has the Ministry of Public Security inspection report, ISO9001 quality system certification, ISO14001 environmental management system certification, ISO45001 China occupational health and safety management system certification, and access gate Top ten brands in the industry, Guangdong Province 3A credit rating certificate, safety production standardization standard small and micro enterprise, entrance and exit control system brand award and multiple patent certificates, software publications, etc.

Noah access Technology has always adhered to user demand-oriented and achieved good market reputation and user feedback with excellent quality and excellent service. Noah access Technology will continue to adhere to the principle of "quality first, service first", pursue excellent quality, technological innovation and corporate development, and create greater value for customers and the industry.

Technological Innovation It Is The Vitality Of The Enterprise

We have attached great importance to product innovation for many years, and strictly control every step of the product production process from research and development to production. Every year, we launch more products that meet market demand according to new market changes. With our continuous efforts, we have gained many Honor, but we do not feel complacent about it, but serve as a ladder to reach higher goals .



Honor - Affirmation And Encouragement



Workshop

Excellent Equipment And Advanced Technology

Noah (Intelligent Manufacturing Workshop) introduces advanced intelligent production lines throughout the entire production cycle from raw materials, molds, die-casting, etc. In order to ensure product quality, it strictly implements IS9002 and OS standards and is equipped with full-time inspection personnel and professional inspection equipment. , strict inspection is carried out from the raw materials entering the factory to the products leaving the factory. Customer satisfaction is Noah's sonorous commitment to customers!




▲ All are taken in real scene, please don't steal!



Previous Exhibitions

Power Brand, World Attention

Market-oriented and good at studying the market. Examine the changes and development of the market with a keen eye, actively participate in market competition according to market rules and laws, and win the market with rational and standardized behavior!

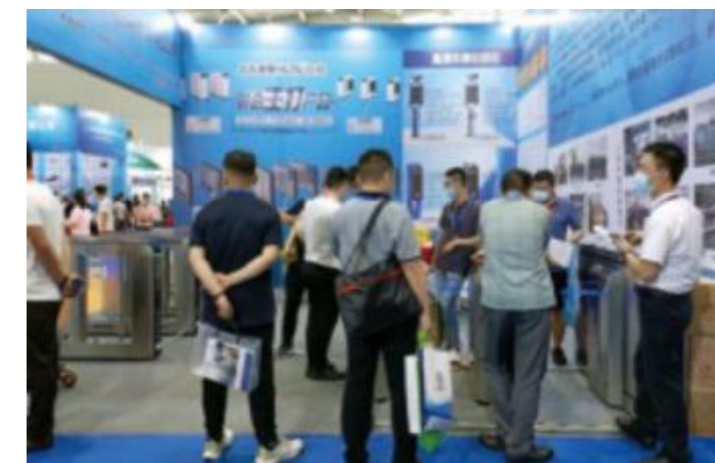

High Speed Gate

Brushless Servo Motor Quick Pass

Supports multi-functional customization such as card swiping, Face recognition, code scanning recognition, Ticketing system and construction site system .



Brushless Anti-collision



Silent Buffer



Infrared Anti-pinch



Strong And Reliable



0.2 Seconds

0.2 Second Recognition And Opening

20~60 People

45 People/Min Traffic Speed

500M times

5 Million Uses

Functional Characteristics



- ◆ Using a dedicated ARM core microprocessor control circuit and digital positioning technology, the startup and control are smooth and the gate's automatic control capability is more accurate .
- ◆ The system operates smoothly, has low noise, and has a simple and reliable structure .
- ◆ The surface of the movement is treated with anti-rust and anti-corrosion treatment, making it durable .
- ◆ Intelligent voice and sound effect prompts make the device more user-friendly and easier to use .
- ◆ The control panel has a counting function .
- ◆ It can be connected with various equipment such as access control systems, consumer systems, electronic ticket systems, biometric identification systems, and electrostatic testers .
- ◆ The channels will automatically spread out after power off and close automatically when power is turned on .
- ◆ Anti-collision function, the swing arm automatically locks when the gate opening signal is not received.
- ◆ The management computer can be used directly to realize remote control and management .

Intelligent Embedded System



Face Recognition



Fingerprint Recognition



Consumer System




QR Code Recognition



Identity Card Reader

Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions .

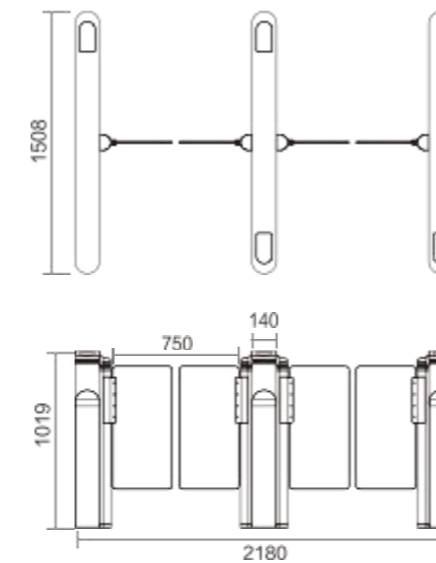

TD8141-21






Front View

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*140*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



AB01

Chassis Material	SUS304 Stainless Steel
Chassis Size	3000*180*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

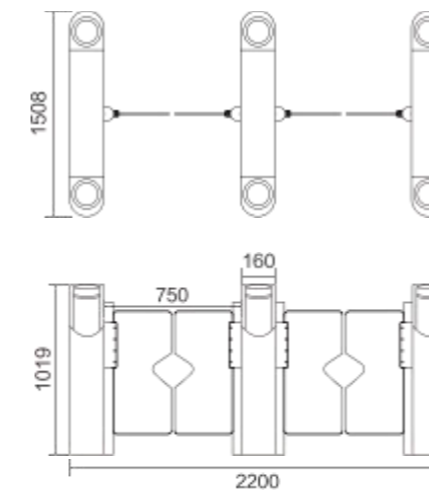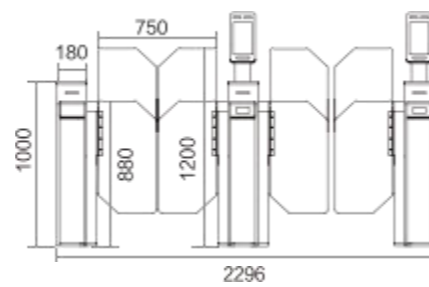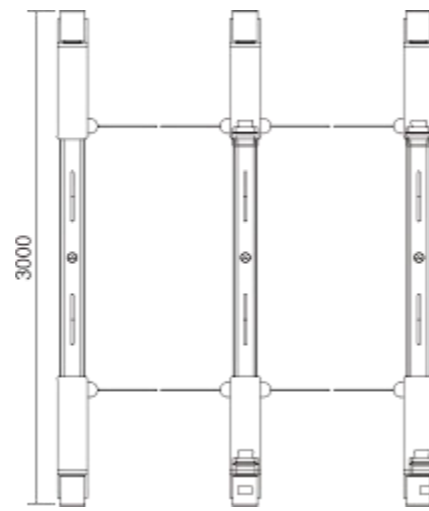

TD8163-22

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*160*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C




Front View

Intelligent Embedded System





AB02

Chassis Material	SUS304 Stainless Steel
Chassis Size	3000*180*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

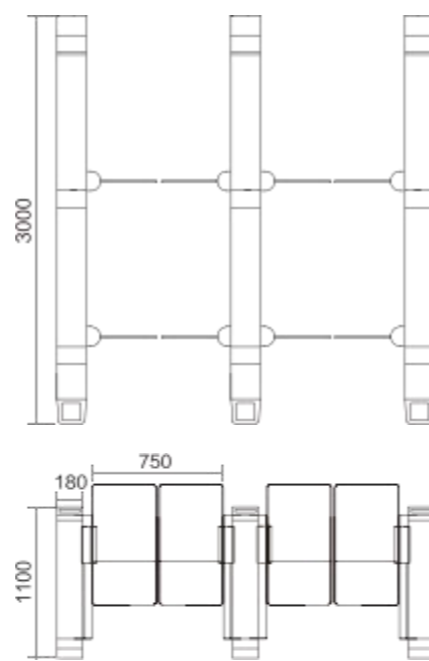


Front View

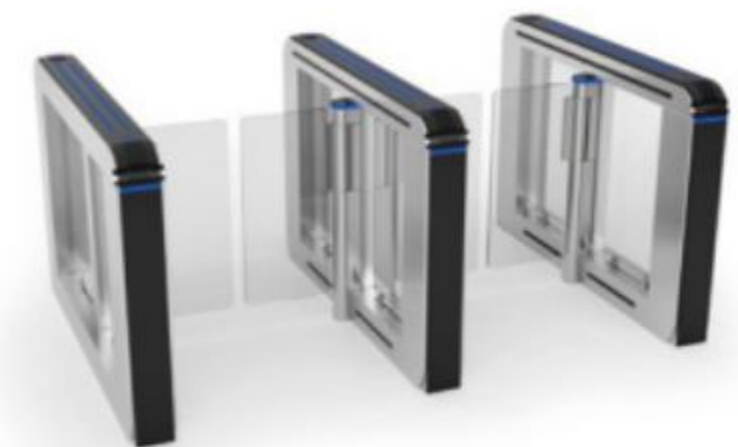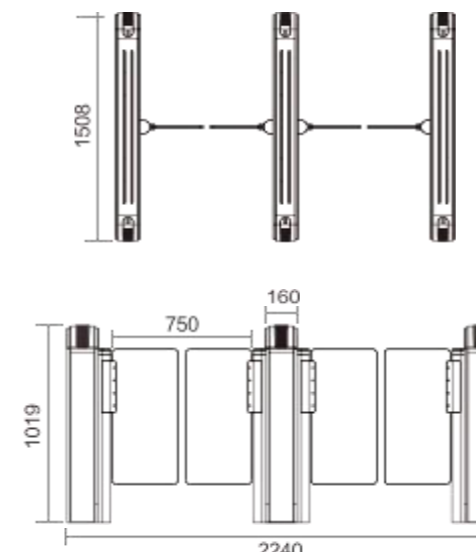

TD8132-21

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*160*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

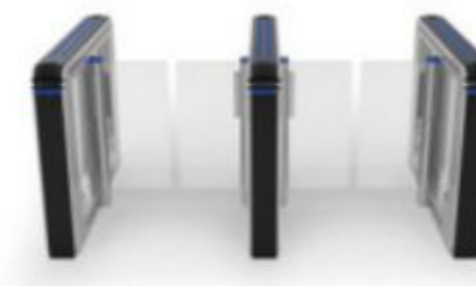

Front View


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




STM002

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*150*1020mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

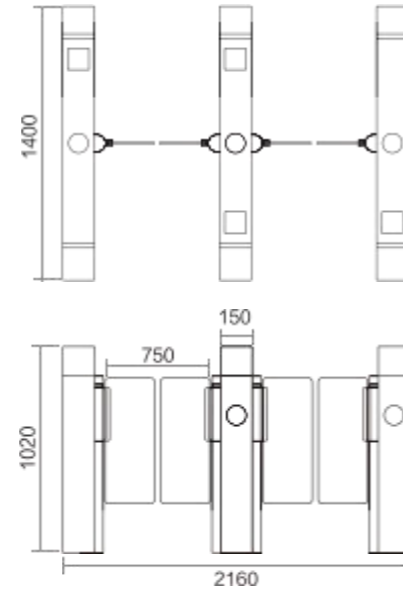

Front View

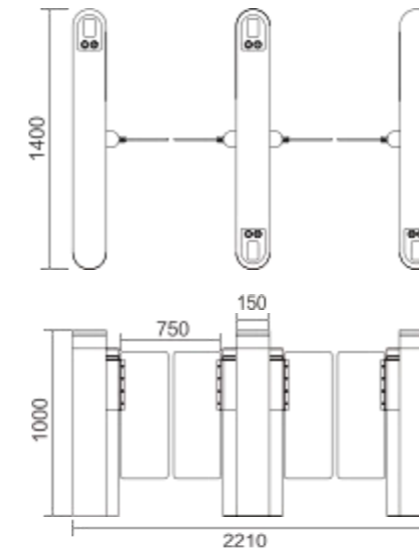

Front View



STM004

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*150*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

Intelligent Embedded System



Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




STM003

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*120*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

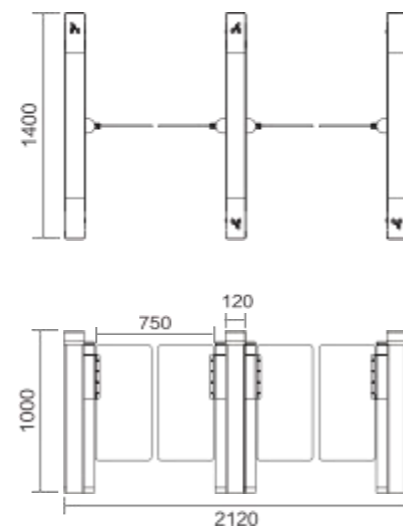

Front View

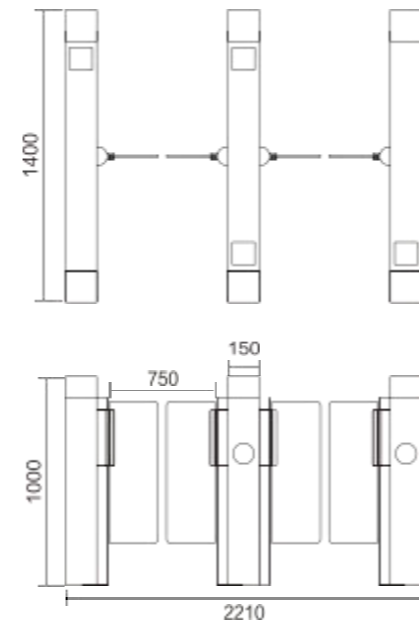

Front View




STM005

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*150*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C



STM006

Chassis Material	SUS304 Stainless Steel
Chassis Size	168*168*1050mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

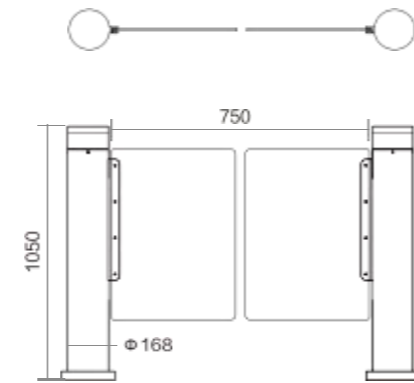



Front View

Intelligent Embedded System




STM010

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*120*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

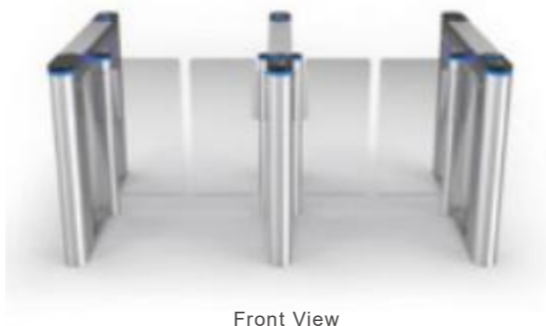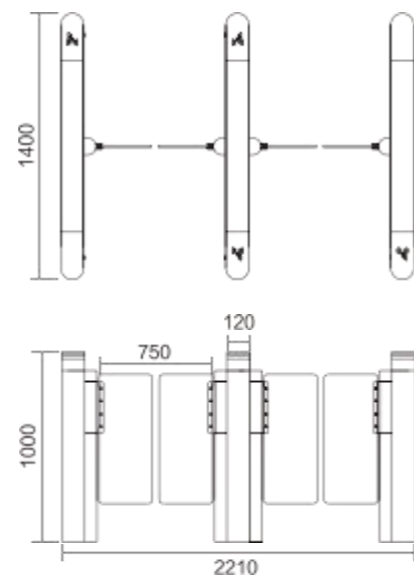

Front View

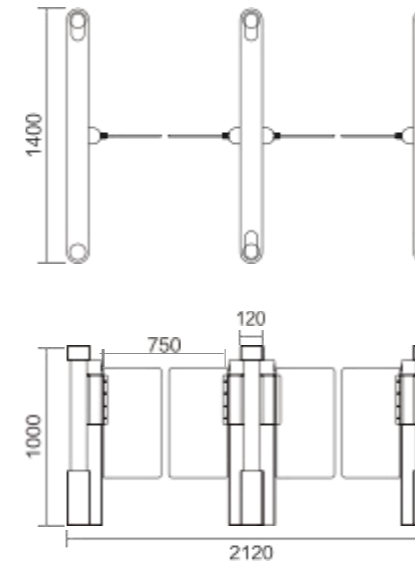

Front View



STM011

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*120*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




STM019

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*120*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

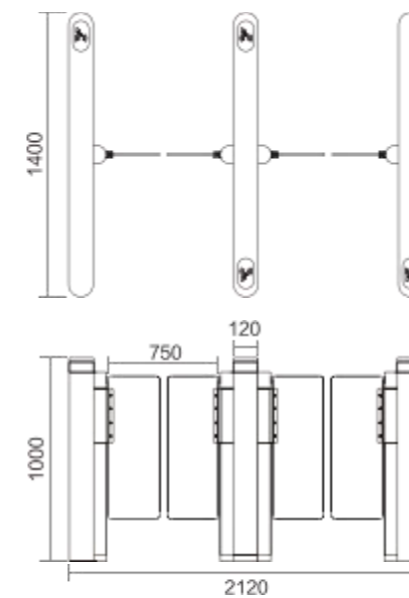


Front View

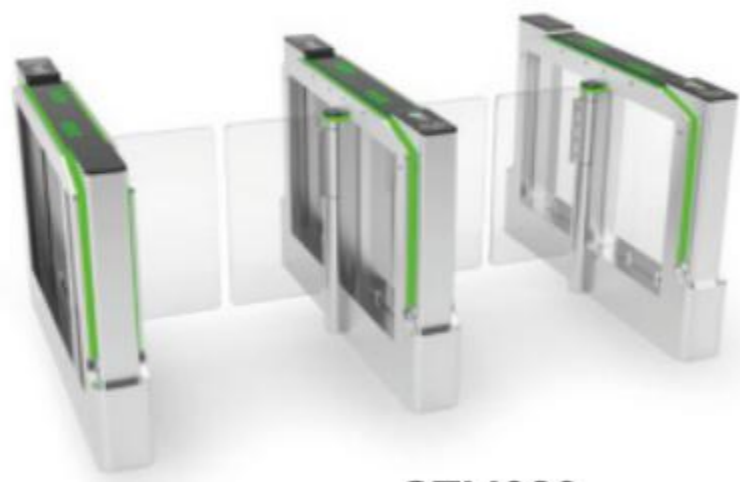


STM020

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*190*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

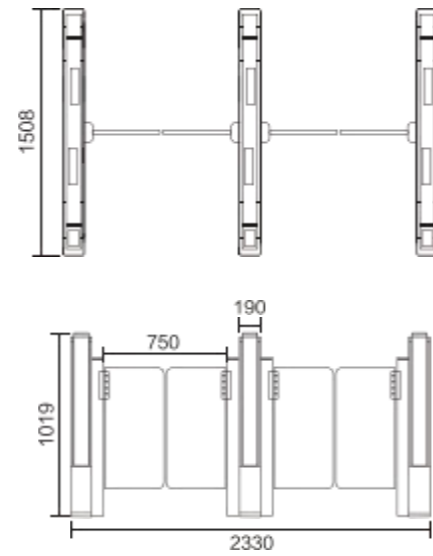

Front View

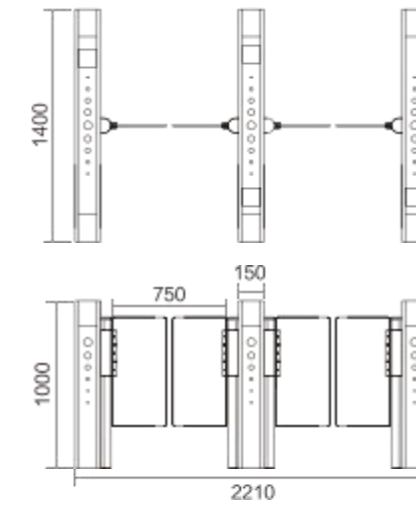

Front View



STM039


Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*150*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Intelligent Embedded System




Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.

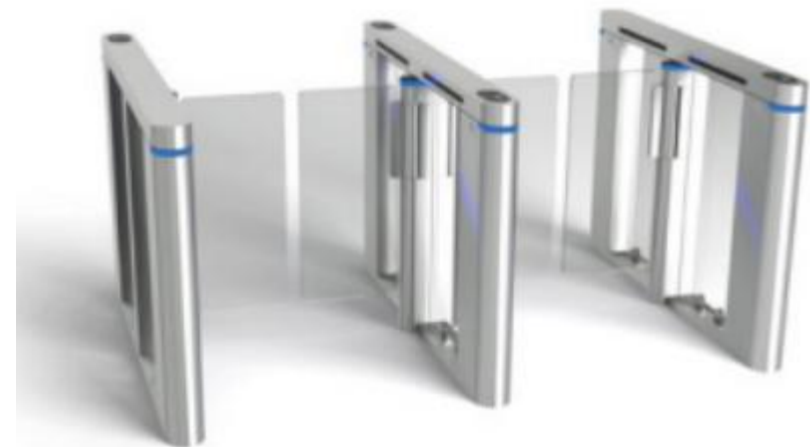


STM029

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*120*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

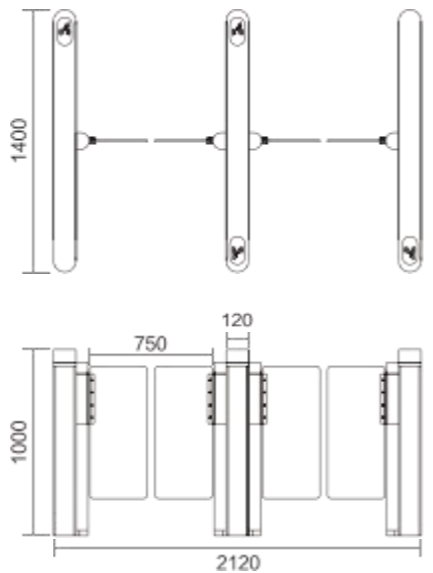

Front View

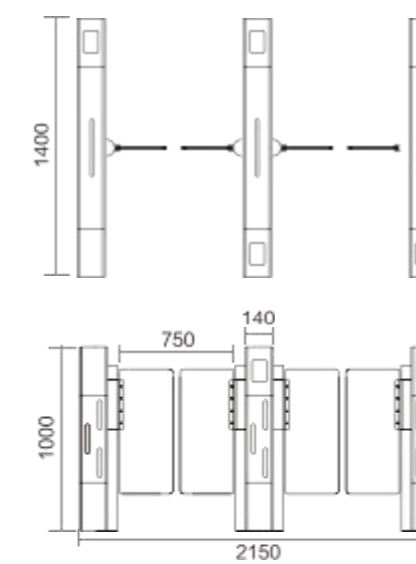

Front View



STM188

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*140*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	650mm~1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

Flap Turnstile

Brushless Servo Motor Quick Pass

Supports multi-functional customization such as card swiping, Face recognition, code scanning recognition, Ticketing system and construction site system.



Brushless Anti-collision



Silent Buffer



Infrared Anti-pinch



Strong And Reliable



0.2 Seconds

0.2 Second Recognition And Opening

20~60 People

45 People/Min Traffic Speed

500M times

5 Million Uses

Functional Characteristics



- ◆ Using a dedicated ARM core microprocessor control circuit and digital positioning technology, the startup and control are smooth and the gate's automatic control capability is more accurate.
- ◆ The system operates smoothly, has low noise, and has a simple and reliable structure.
- ◆ The surface of the movement is treated with anti-rust and anti-corrosion treatment, making it durable.
- ◆ Intelligent voice and sound effect prompts make the device more user-friendly and easier to use.
- ◆ The control panel has a counting function.
- ◆ It can be connected with various equipment such as access control systems, consumer systems, electronic ticket systems, biometric identification systems, and electrostatic testers.
- ◆ The channels will automatically spread out after power off and close automatically when power is turned on.
- ◆ Anti-collision function, the swing arm automatically locks when the gate opening signal is not received.
- ◆ The management computer can be used directly to realize remote control and management.

Intelligent Embedded System



Face Recognition



Fingerprint Recognition



Consumer System



QR Code Recognition



Identity Card Reader

Application Scenarios


- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.







YZ016

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*1019mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

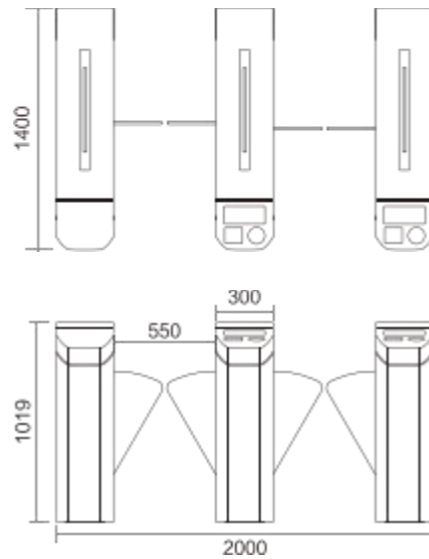

Front View

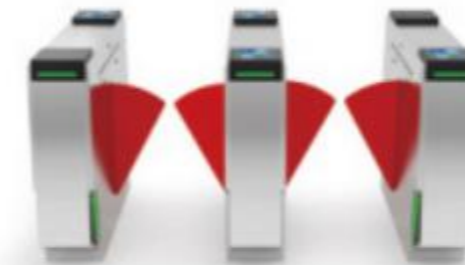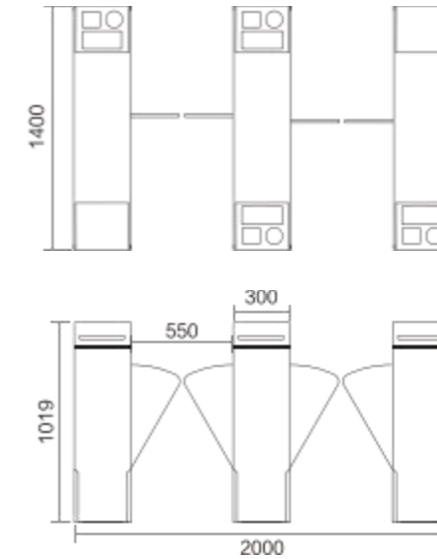

Front View



YZ018

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*1019mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Intelligent Embedded System




Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader




YZ017

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*1019mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

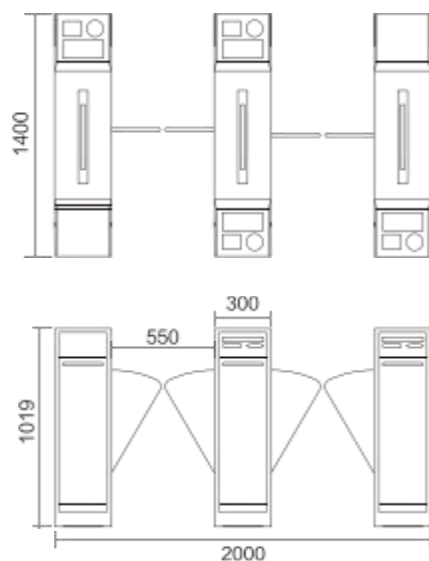

Front View

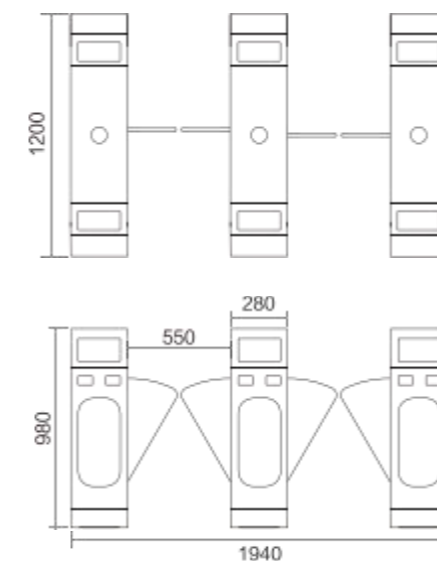

Front View



QC001

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*980mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




TD6303-22

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*300*1019mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	550/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

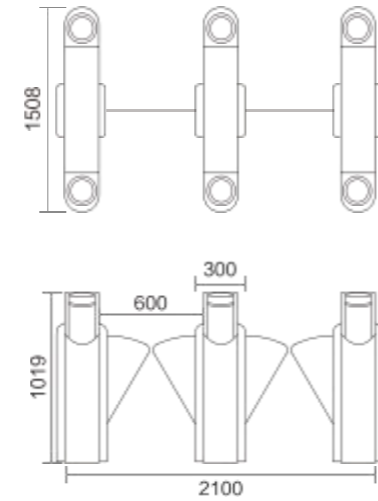

Front View

Intelligent Embedded System

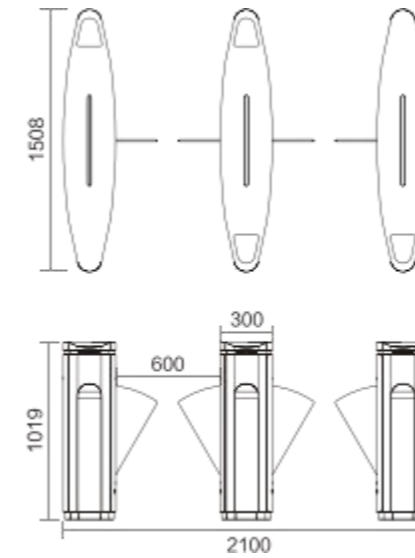

TD6301-21

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*300*1019mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Front View


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.



TD6302-21

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*300*1019mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

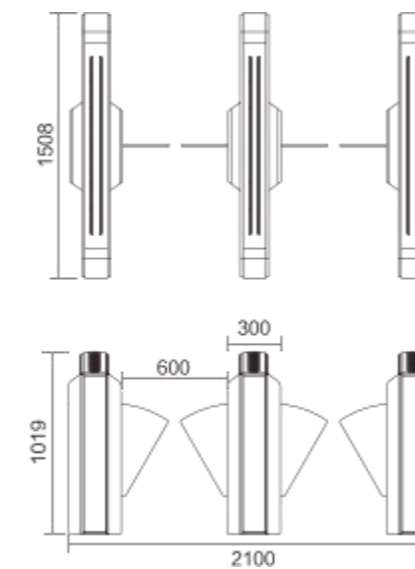


Front View




Y001

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*300*980mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	500/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

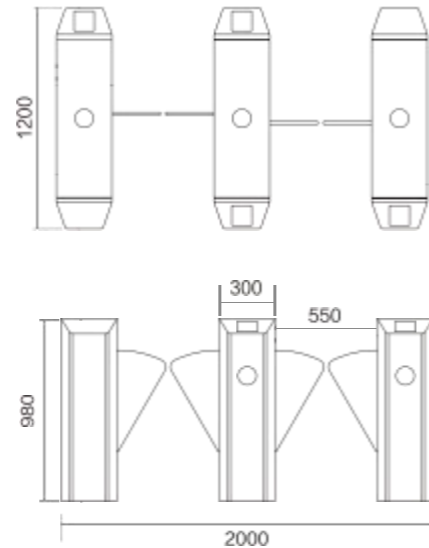

Front View

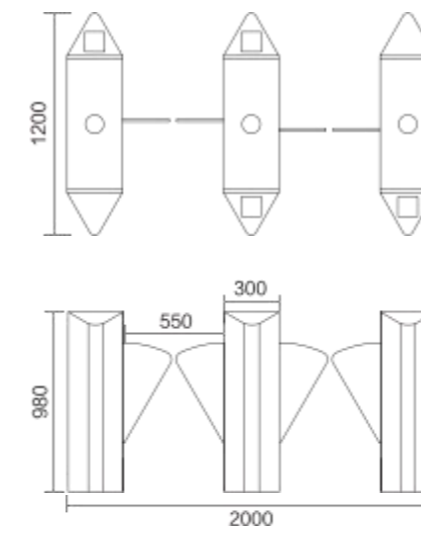

Front View



Y003


Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*300*980mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	500/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Intelligent Embedded System




Y002

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*300*980mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	500/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

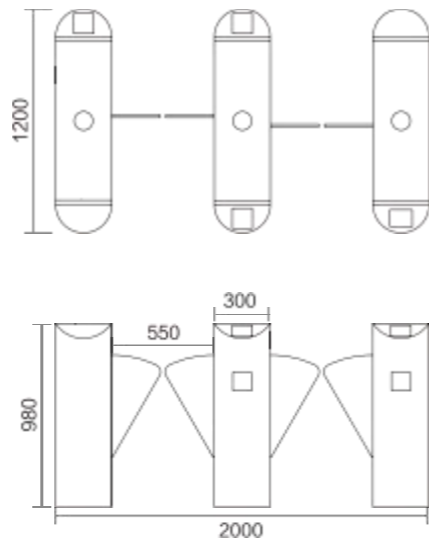

Front View

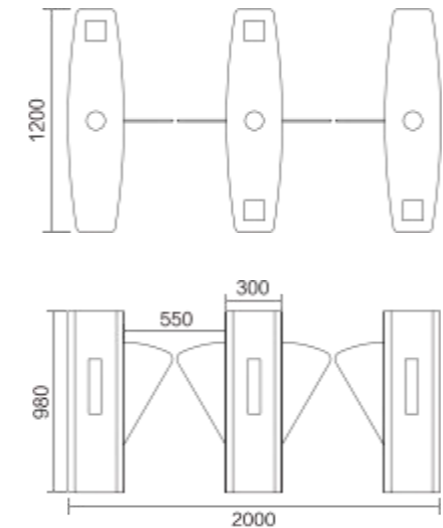

Front View



Y004

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*300*980mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	500/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C


Application Scenarios

- Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




Y005 蛋形翼闸

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*300*980mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	500/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

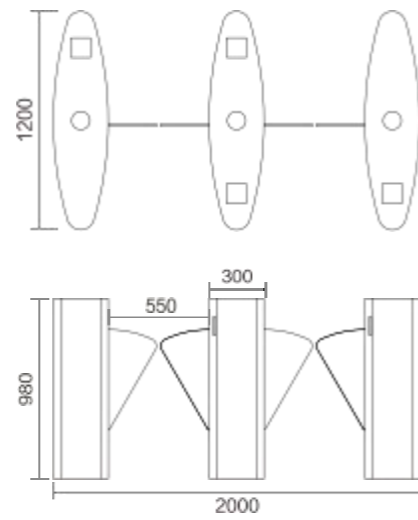

Front View

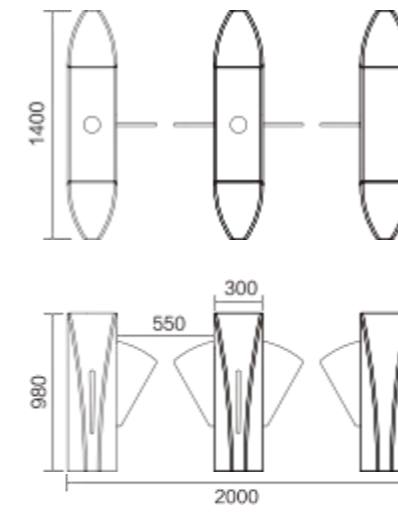

Y009

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*300*980mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	500/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Front View

Intelligent Embedded System




Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader




Y006

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*280*1040mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	500/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

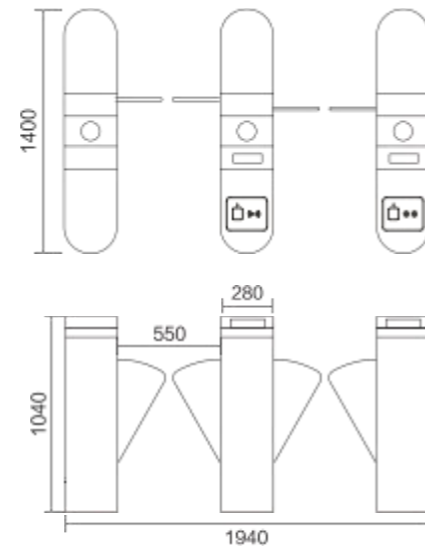

Front View

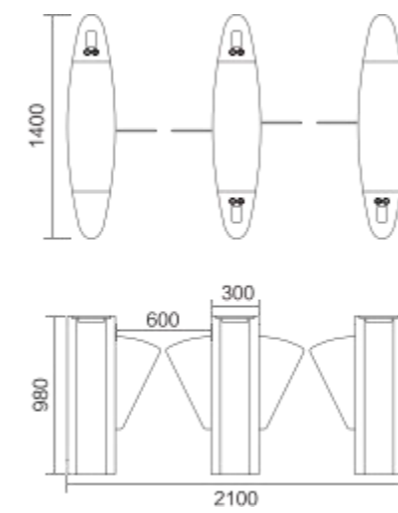

Y010

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*1040mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	500/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Front View


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




Y011

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*980mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	550/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

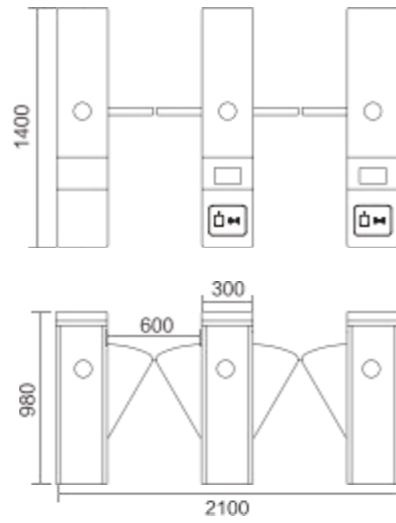

Front View

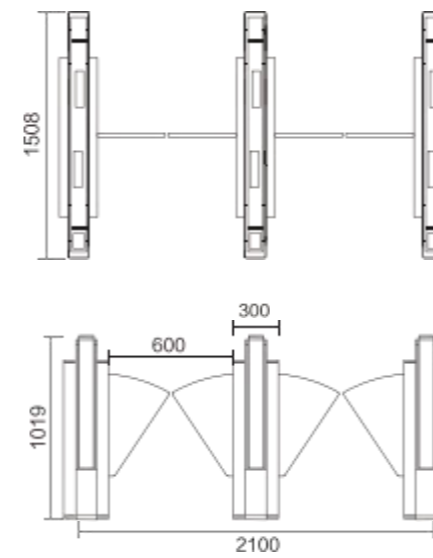

Front View



YZ020

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*300*1019mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

Intelligent Embedded System



Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader


Application Scenarios

- Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




Y019 豪华子母翼闸


Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*980mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	600-900mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

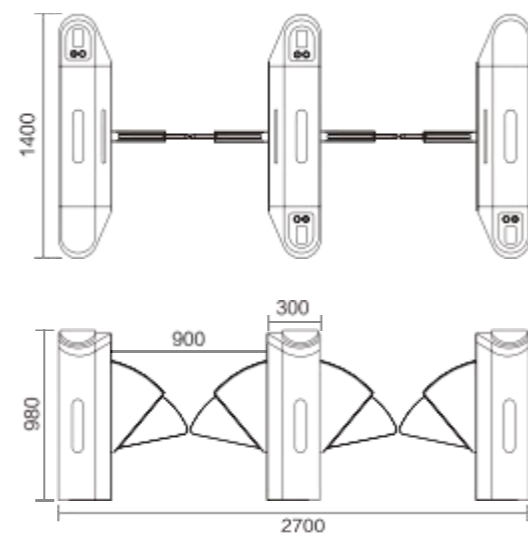

Front View

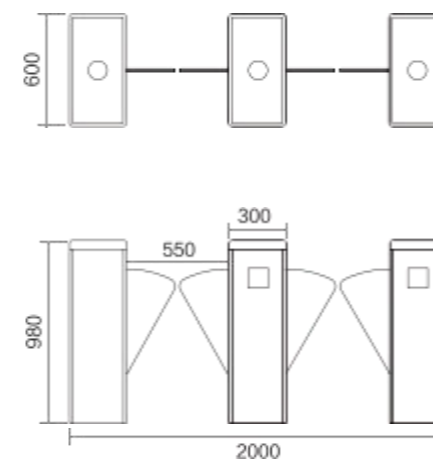

Front View

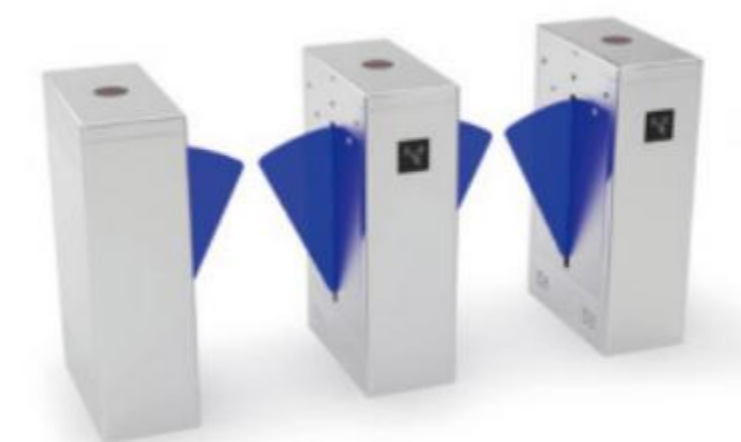

YZ021

Chassis Material	SUS304 Stainless Steel
Chassis Size	600*300*980mm(L*W*H)
Door Wing Material	15mm Plexiglass, Tempered Glass
Passage Width	550/600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Swing Turnstile

Brushless Servo Motor Quick Pass

Supports multi-functional customization such as card swiping, Face recognition, code scanning recognition, Ticketing system and construction site system.



Brushless Anti-collision



Silent Buffer



Infrared Anti-pinch



Strong And Reliable



BZ016

0.2 Seconds
0.2 Second Recognition And Opening

20~60 People
45 People/Min Traffic Speed

500M times
5 Million Uses

Functional Characteristics



- ◆ Using a dedicated ARM core microprocessor control circuit and digital positioning technology, the startup and control are smooth and the gate's automatic control capability is more accurate.
- ◆ The system operates smoothly, has low noise, and has a simple and reliable structure.
- ◆ The surface of the movement is treated with anti-rust and anti-corrosion treatment, making it durable.
- ◆ Intelligent voice and sound effect prompts make the device more user-friendly and easier to use.
- ◆ The control panel has a counting function.
- ◆ It can be connected with various equipment such as access control systems, consumer systems, electronic ticket systems, biometric identification systems, and electrostatic testers.
- ◆ The channels will automatically spread out after power off and close automatically when power is turned on.
- ◆ Anti-collision function, the swing arm automatically locks when the gate opening signal is not received.
- ◆ The management computer can be used directly to realize remote control and management.

Intelligent Embedded System



Face Recognition



Fingerprint Recognition



Consumer System



QR Code Recognition



Identity Card Reader

Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.



BZ018



QC002



BZ002




BZ010




BZ016

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	600-850mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

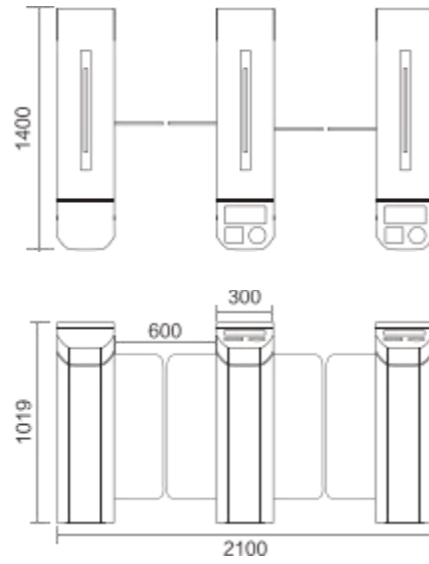

Front View

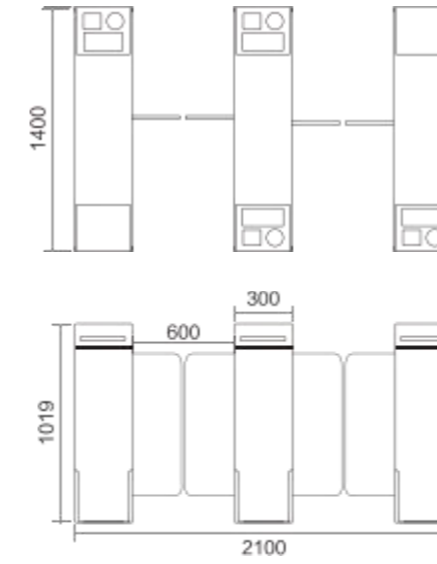

Front View



BZ018

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	600-850mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Intelligent Embedded System




Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader




BZ017

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	600-850mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

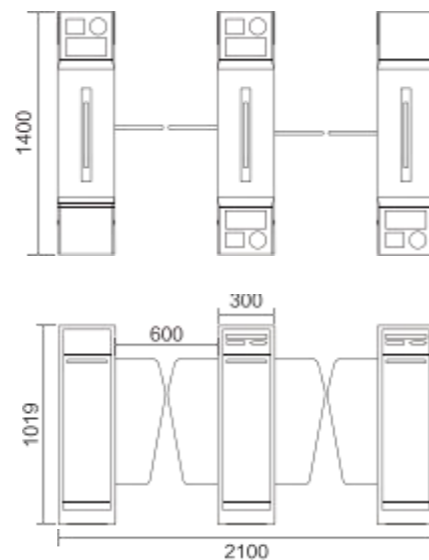

Front View

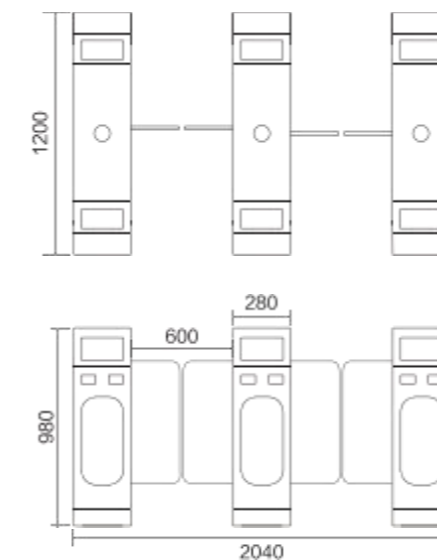

Front View



QC002

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*980mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	600-920mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.



BZ001

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*1000mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤800mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

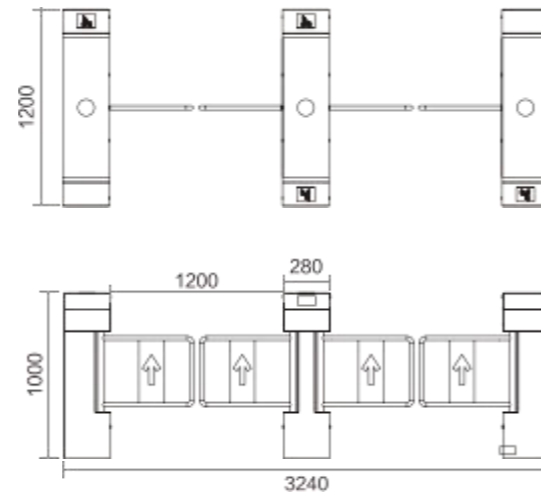

Front View

Intelligent Embedded System




Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader




BZ002

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*1000mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤800mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

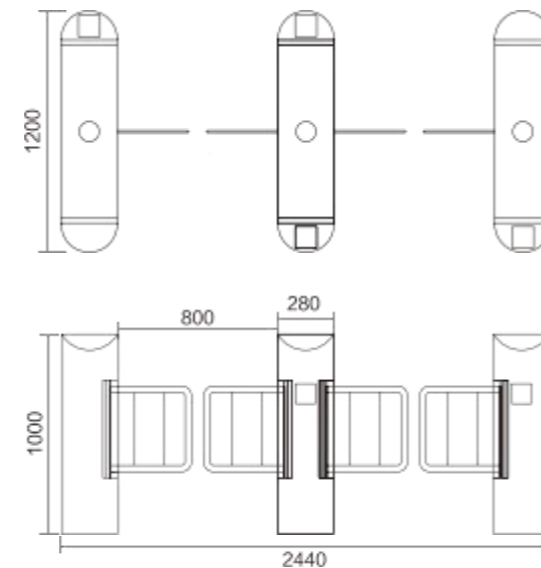

Front View

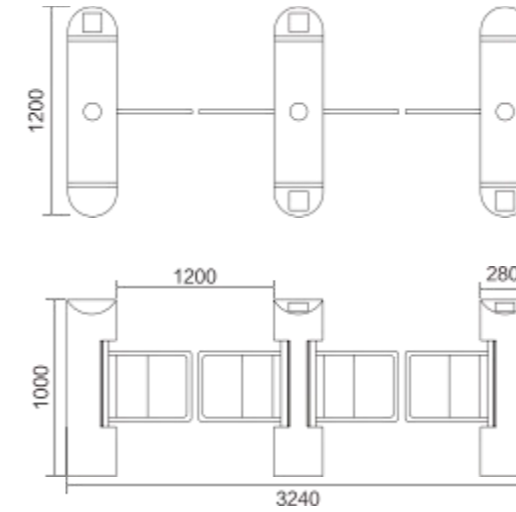

Front View





BZ003

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*1000mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤800mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.

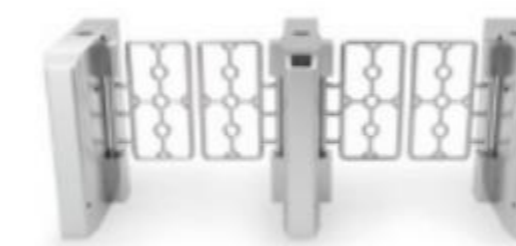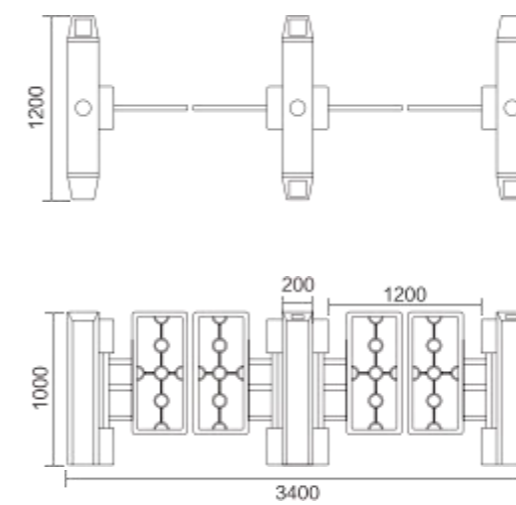

Front View




BZ004

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*300*1000mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤1220mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C




BZ005

Chassis Material	SUS304 Stainless Steel
Chassis Size	420*330*1000mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤1200mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

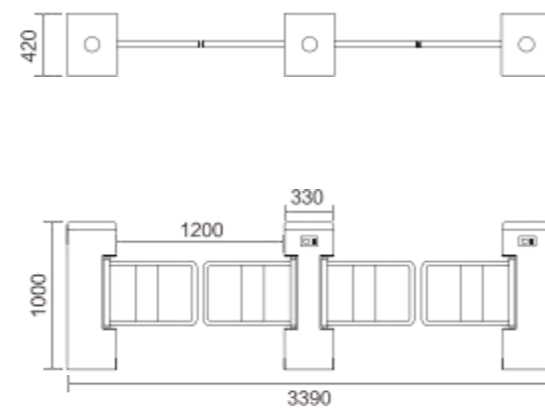

Front View


Intelligent Embedded System

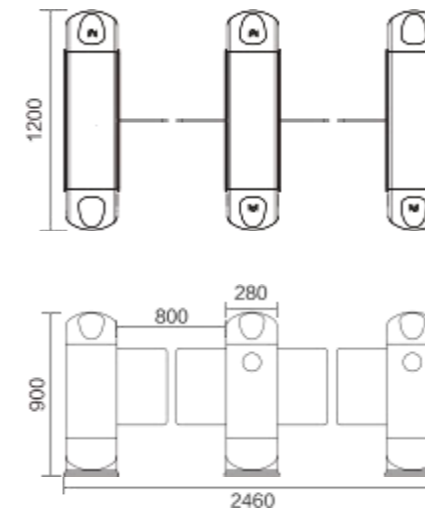

BZ010



Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤820mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

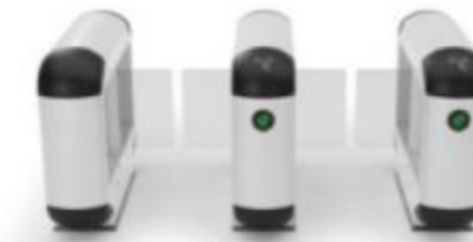

Front View


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




BZ009

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤800mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

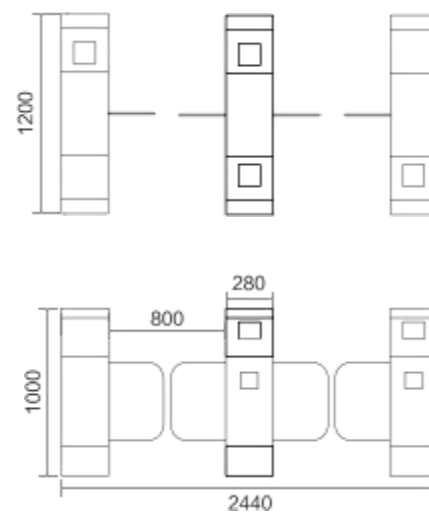

Front View

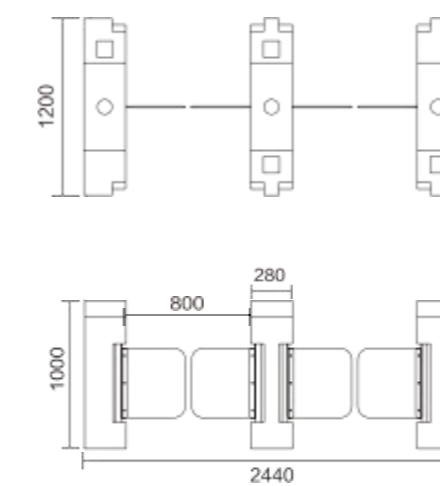

BZ011

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤1200mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C




Front View




HBZ01

Chassis Material	SUS304 Stainless Steel
Chassis Size	260*180*1050mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤2000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

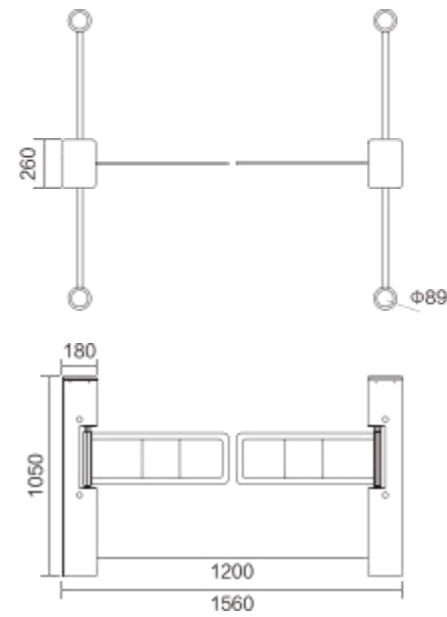

Front View

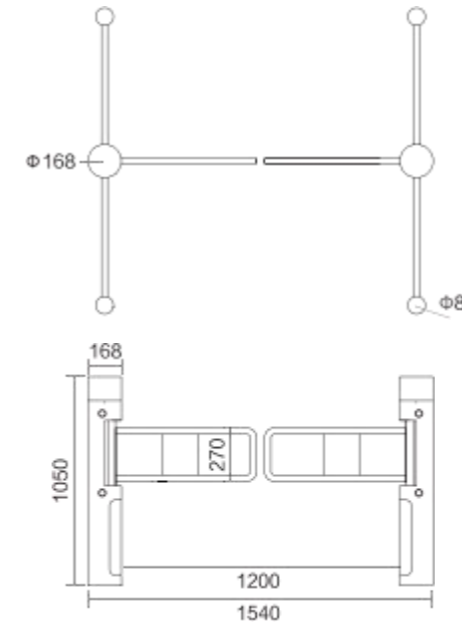

Front View




YZBZ02

Chassis Material	SUS304 Stainless Steel
Chassis Size	168*168*1150mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤2000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C




YZBZ01

Chassis Material	SUS304 Stainless Steel
Chassis Size	220*180*1150mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤2000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

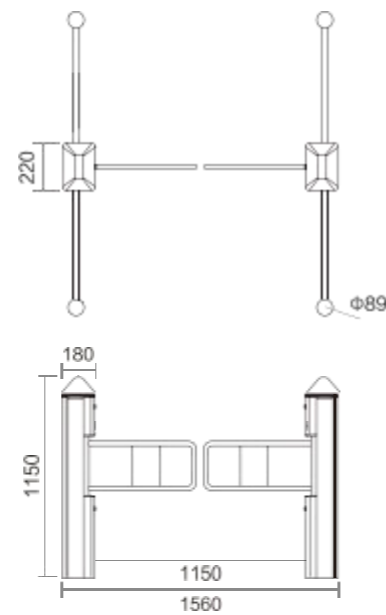

Front View

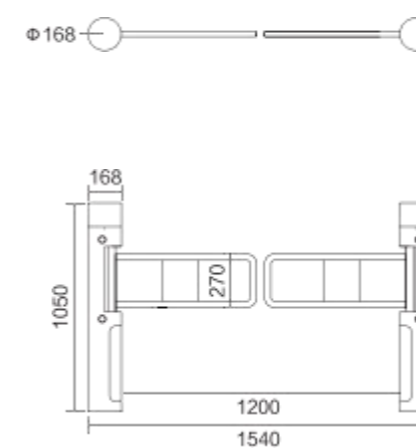

Front View



YZBZ03


Chassis Material	SUS304 Stainless Steel
Chassis Size	168*168*1150mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤2000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

Small Swing Turnstile

Supports multi-functional customization such as card swiping, Face recognition, code scanning recognition, Ticketing system and construction site system.

TD92002-21

Chassis Size: 1400*200*1000mm(L*W*H)

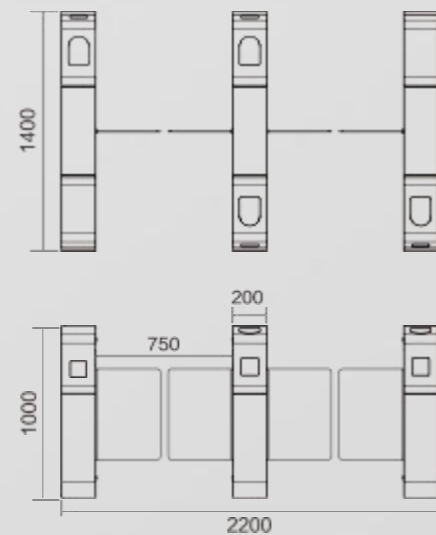

Functional Characteristics




- ◆ Using a dedicated ARM core microprocessor control circuit and digital positioning technology, the startup and control are smooth and the gate's automatic control capability is more accurate.
- ◆ The system operates smoothly, has low noise, and has a simple and reliable structure.
- ◆ The surface of the movement is treated with anti-rust and anti-corrosion treatment, making it durable.
- ◆ Intelligent voice and sound effect prompts make the device more user-friendly and easier to use.
- ◆ The control panel has a counting function.
- ◆ It can be connected with various equipment such as access control systems, consumer systems, electronic ticket systems, biometric identification systems, and electrostatic testers.
- ◆ The channels will automatically spread out after power off and close automatically when power is turned on.
- ◆ Anti-collision function, the swing arm automatically locks when the gate opening signal is not received.
- ◆ The management computer can be used directly to realize remote control and management.

Intelligent Embedded System



Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.

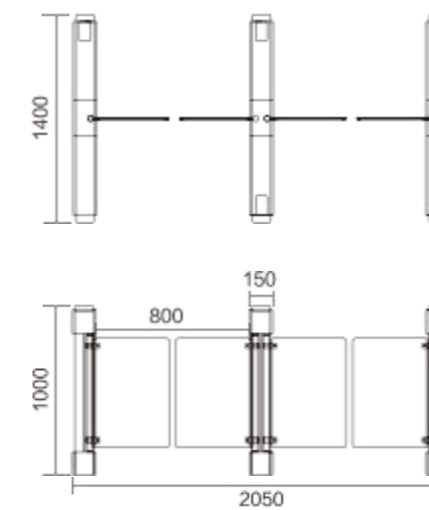


STZ003




Front View

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*150*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤ 1200mm
Input Voltage	110V~220V, 50HZ
Opening Speed	Fastest < 0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C


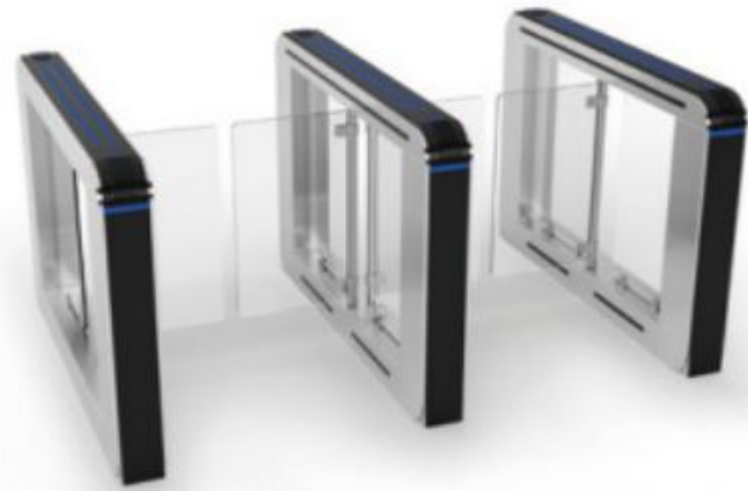


TD9162-21

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*160*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C

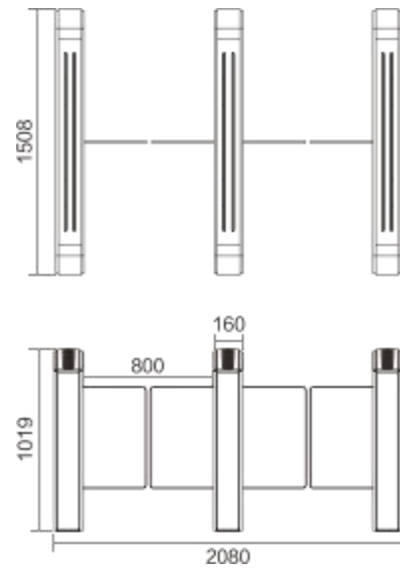

Front View

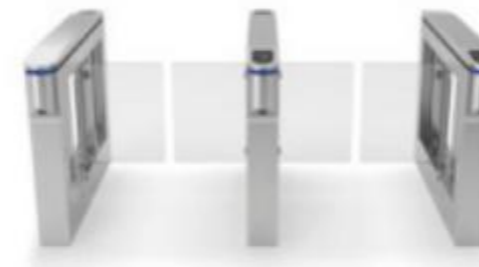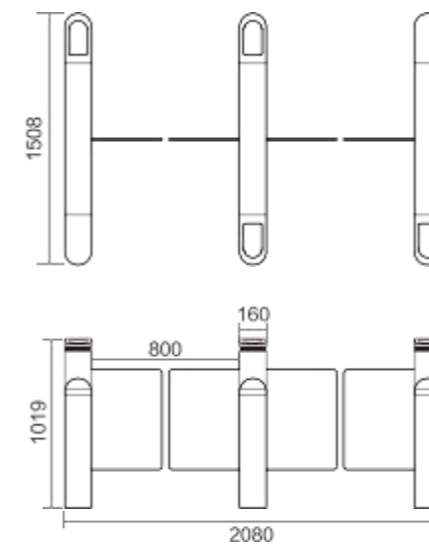

Front View



TD9151-21



Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*160*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Intelligent Embedded System




XBZ001

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*160*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤1000mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

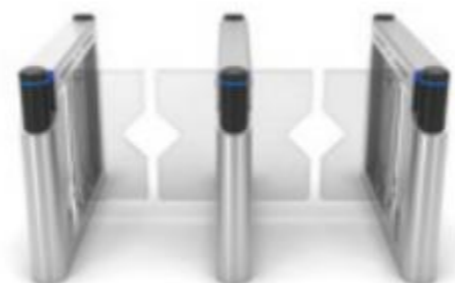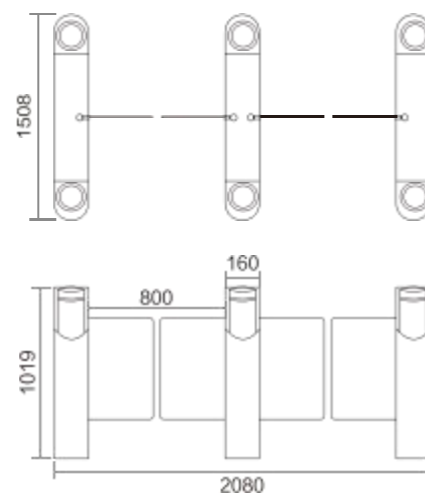

Front View

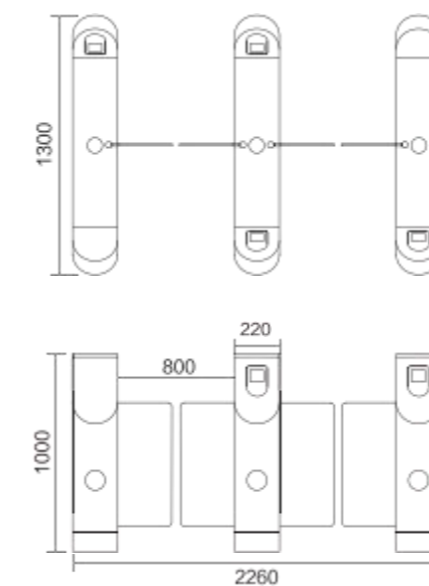

Front View



ETZ008

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*220*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤900mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




BZ001

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*200*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤800mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

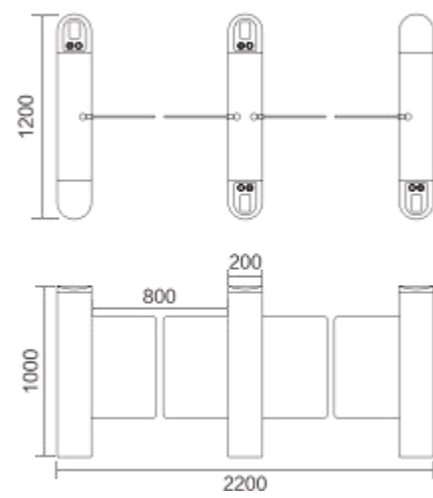

Front View

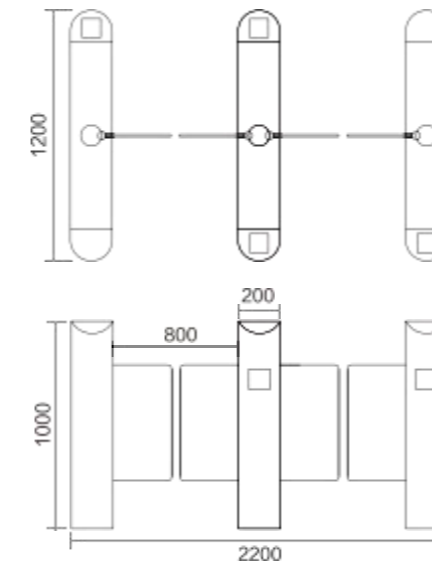

Front View



BZ003

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*200*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤800mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Intelligent Embedded System



Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




XBZ002

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*200*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤800mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

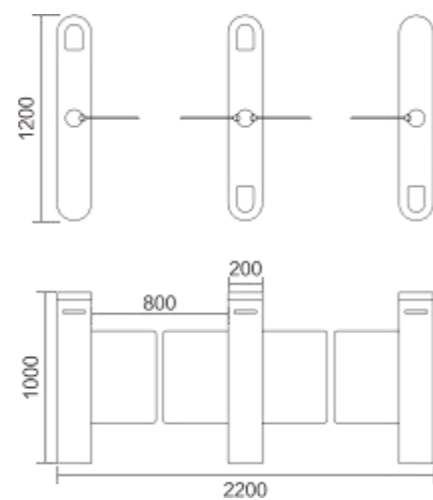

Front View

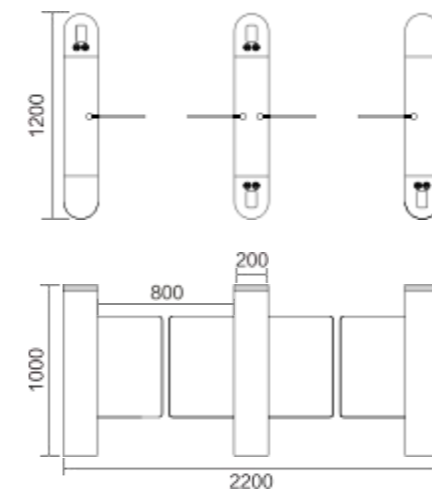

Front View




XBZ004

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*200*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤800mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C




XBZ007

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*200*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤1200mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

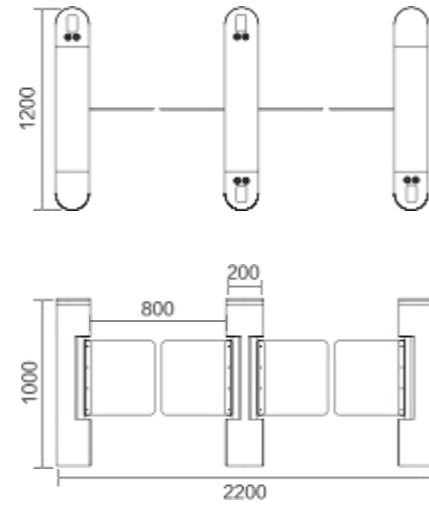

Front View

Intelligent Embedded System

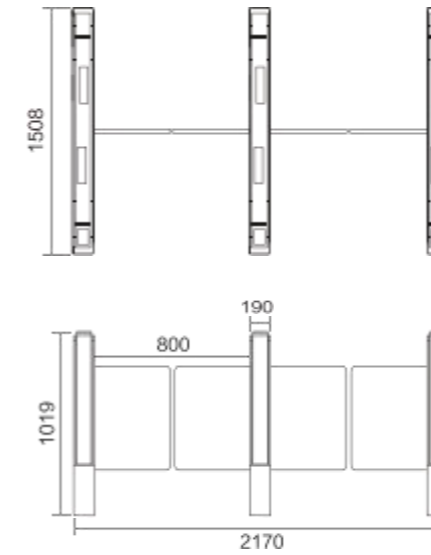

XBZ020

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*190*1019mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤1100mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




XBZ008

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*200*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤1200mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

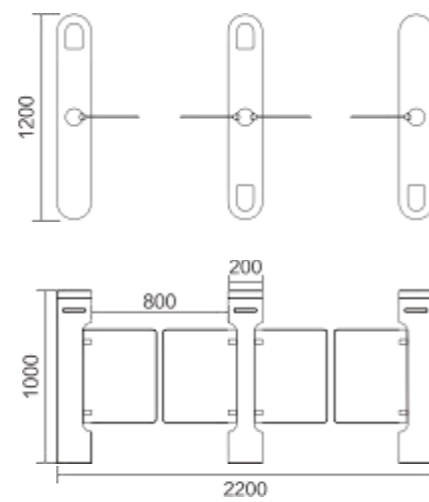

Front View

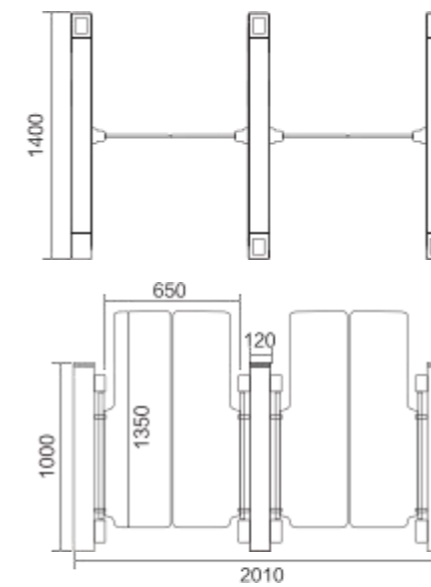

Front View

XBZ021


Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*120*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤800mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Tripod Turnstile

Supports multi-functional customization such as card swiping, Face recognition, code scanning recognition, Ticketing system and construction site system.

TD3263-22

Chassis Size: 1508*220*1019mm(L*W*H)

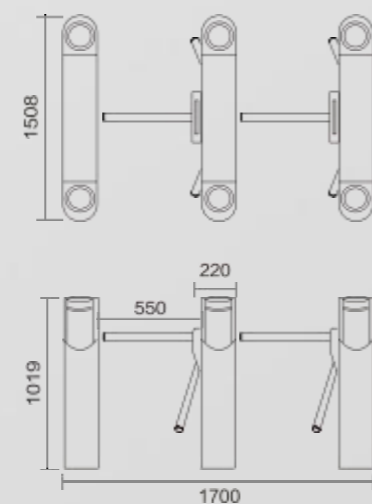

Functional Characteristics




- ◆ Using a dedicated ARM core microprocessor control circuit and digital positioning technology, the startup and control are smooth and the gate's automatic control capability is more accurate.
- ◆ The system operates smoothly, has low noise, and has a simple and reliable structure.
- ◆ The surface of the movement is treated with anti-rust and anti-corrosion treatment, making it durable.
- ◆ Intelligent voice and sound effect prompts make the device more user-friendly and easier to use.
- ◆ The control panel has a counting function.
- ◆ It can be connected with various equipment such as access control systems, consumer systems, electronic ticket systems, biometric identification systems, and electrostatic testers.
- ◆ The channels will automatically spread out after power off and close automatically when power is turned on.
- ◆ Anti-collision function, the swing arm automatically locks when the gate opening signal is not received.
- ◆ The management computer can be used directly to realize remote control and management.

Intelligent Embedded System



Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.

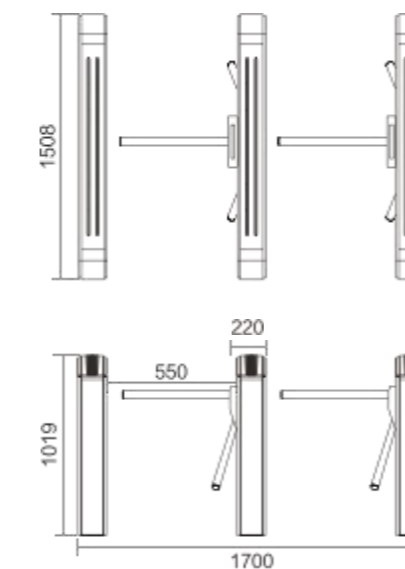

Front View




TD3220-23

Chassis Material	SUS304 Stainless Steel
Chassis Size	1508*220*1019mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor
Ambient Temperature	25°C~70C




SGZ016

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*1019mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

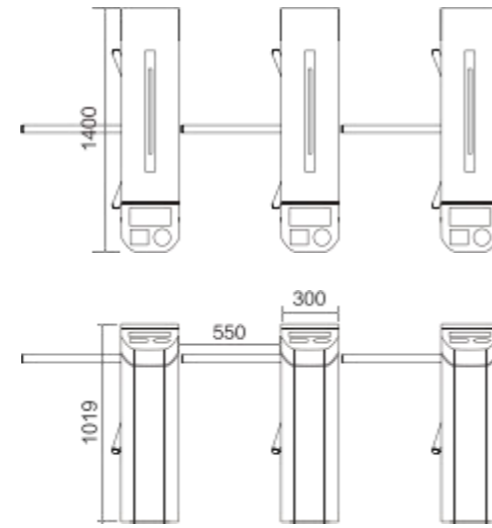

Front View

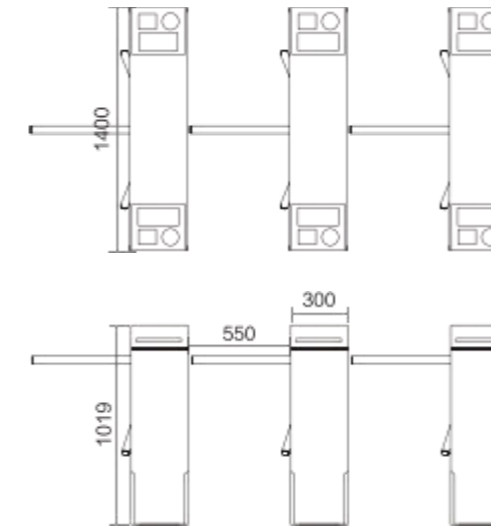

Front View



SGZ018

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*1019mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Intelligent Embedded System




Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader




SGZ017

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*300*1019mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

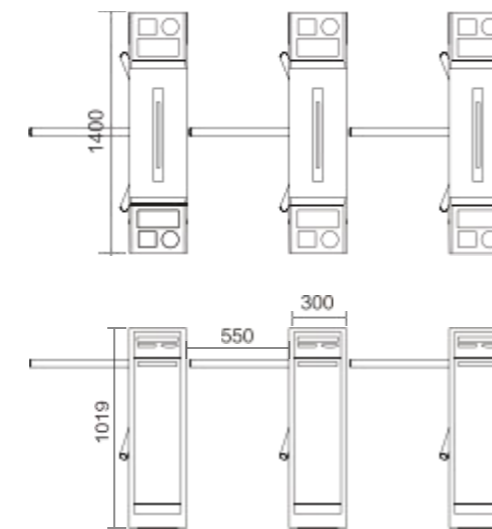

Front View

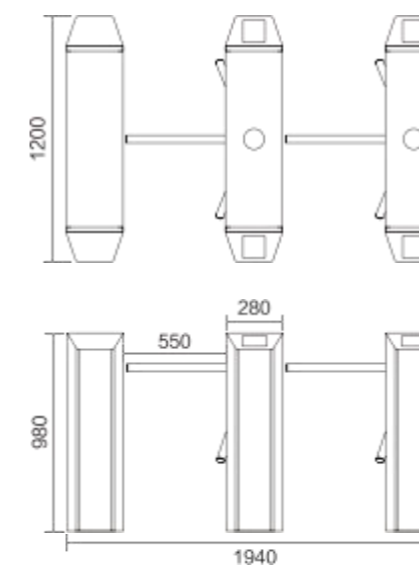

Front View



SGZ001

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*980mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Application Scenarios

- Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




SGZ002

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*980mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

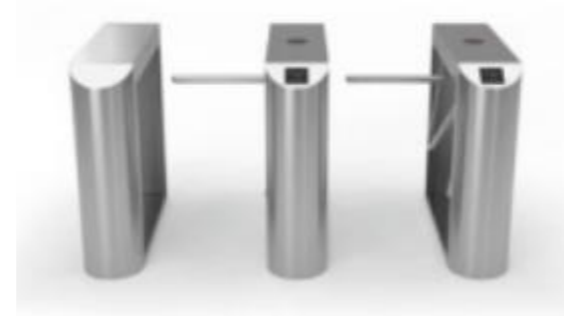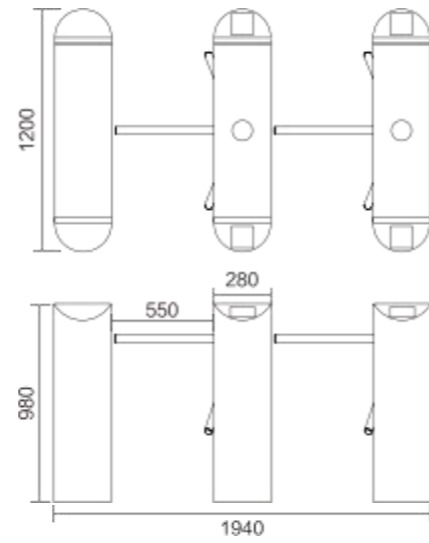

Front View

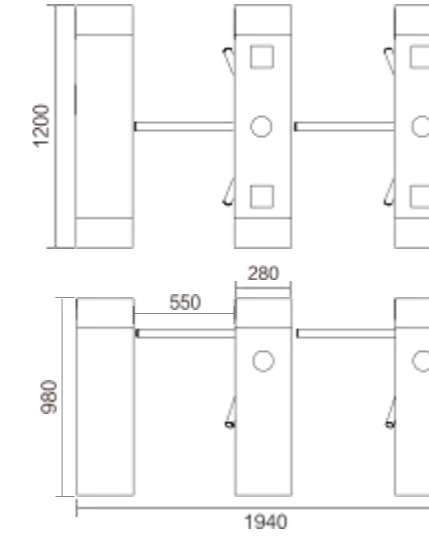

SGZ004

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*280*980mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Front View

Intelligent Embedded System



Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader


Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




SGZ003

Chassis Material	SUS304 Stainless Steel
Chassis Size	420*330*980mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

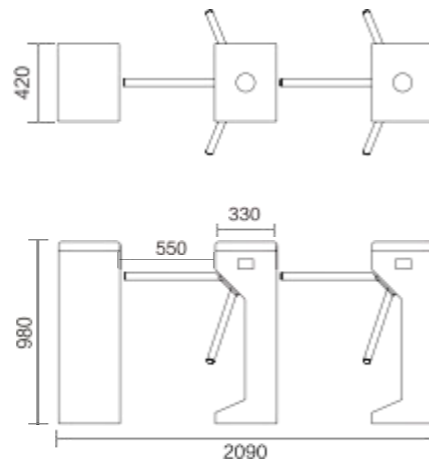

Front View

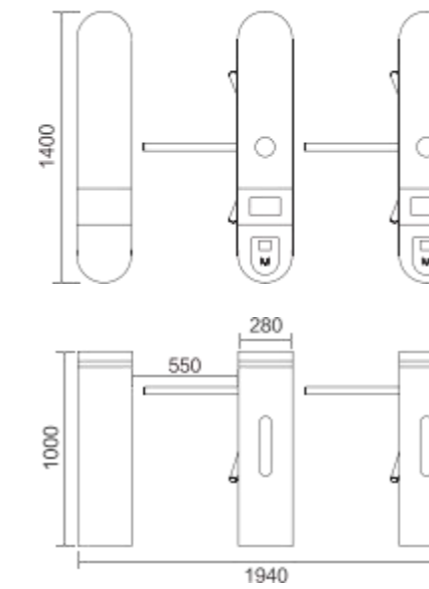

SGZ006

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*280*980mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C





Front View



YZ002

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*200*1000mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

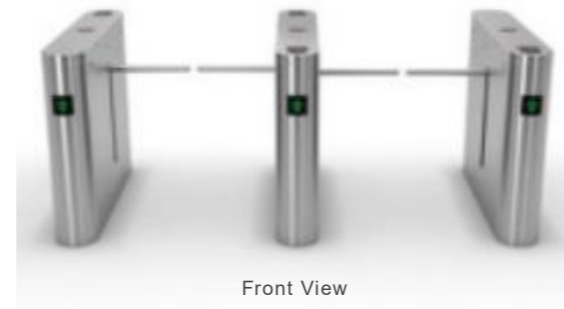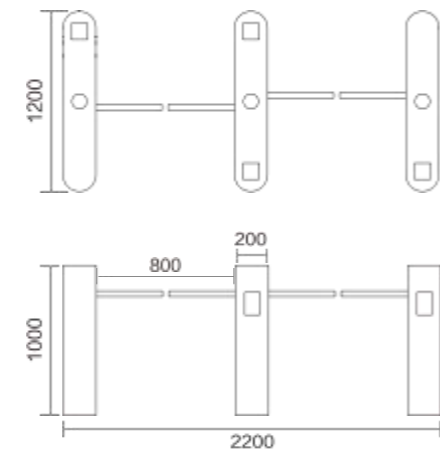

Front View

Intelligent Embedded System





Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader





YZ003

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*200*1000mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

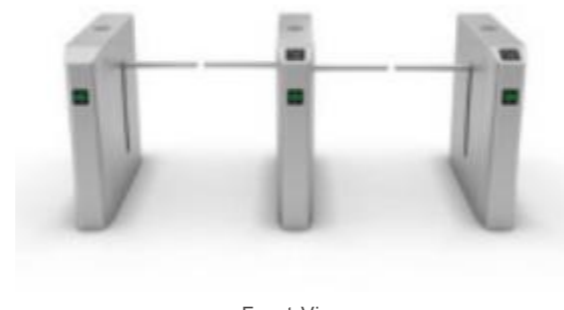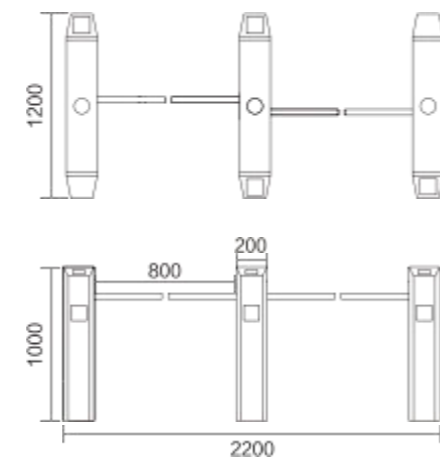

Front View

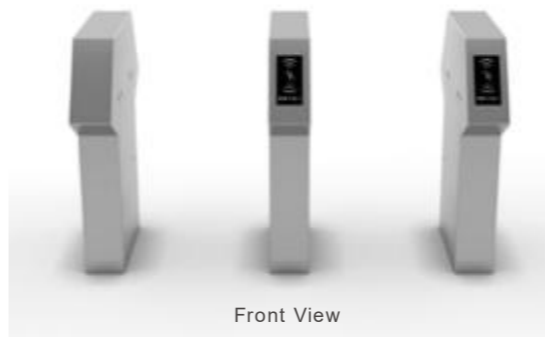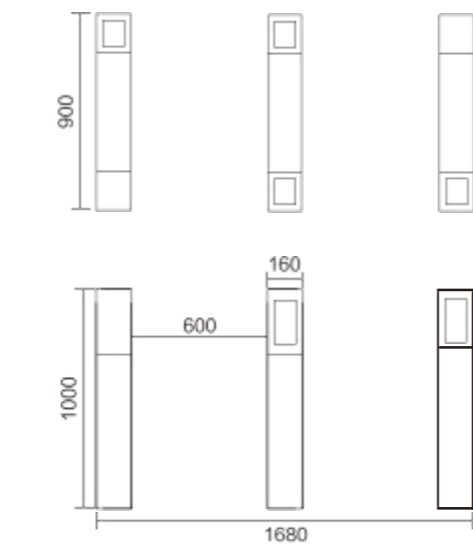

Front View




WZ001

Chassis Material	SUS304 Stainless Steel
Chassis Size	1000*160*900mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.

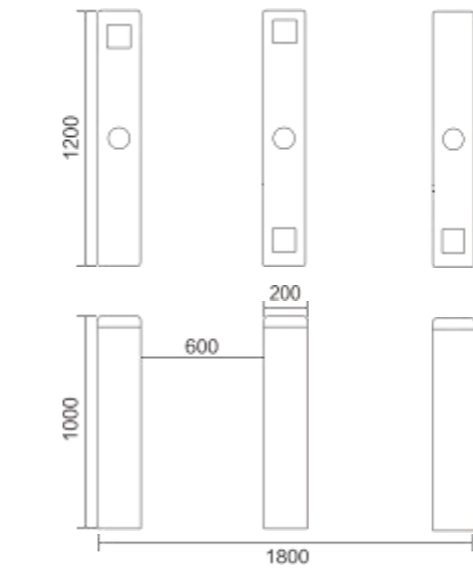

Front View



WZ002

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*200*1000mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Sliding Turnstile

Supports multi-functional customization such as card swiping, Face recognition, code scanning recognition, Ticketing system and construction site system .



Brushless Anti-collision



Silent Buffer



Infrared Anti-pinch



Strong And Reliable



PYZ018

0.2 Seconds

0.2 Second Recognition And Opening

20~60 People

45 People/Min Traffic Speed

500 times

5 Million Uses

Functional Characteristics



- ◆ Using a dedicated ARM core microprocessor control circuit and digital positioning technology, the startup and control are smooth and the gate's automatic control capability is more accurate .
- ◆ The system operates smoothly, has low noise, and has a simple and reliable structure .
- ◆ The surface of the movement is treated with anti-rust and anti-corrosion treatment, making it durable .
- ◆ Intelligent voice and sound effect prompts make the device more user-friendly and easier to use .
- ◆ The control panel has a counting function .
- ◆ It can be connected with various equipment such as access control systems, consumer systems, electronic ticket systems, biometric identification systems, electrostatic testers .
- ◆ The channels will automatically open after power off and close automatically when power is turned on .
- ◆ Anti-collision function, the swing arm automatically locks when the gate opening signal is not received .
- ◆ The management computer can be used directly to realize remote control and management .

Intelligent Embedded System



Face Recognition



Fingerprint Recognition



Consumer System



QR Code Recognition



Identity Card Reader

Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions .



PYZ008



PYZ002



PYZ003




PYZ004




PYZ001

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*330*980mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

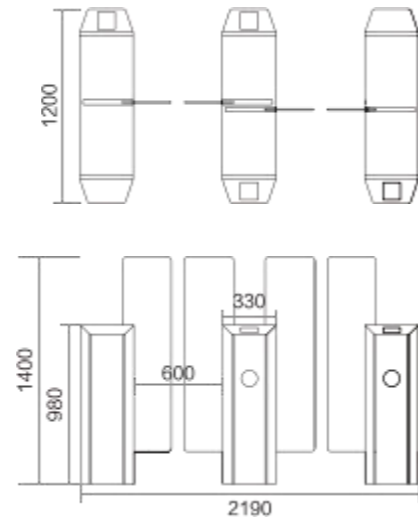

Front View

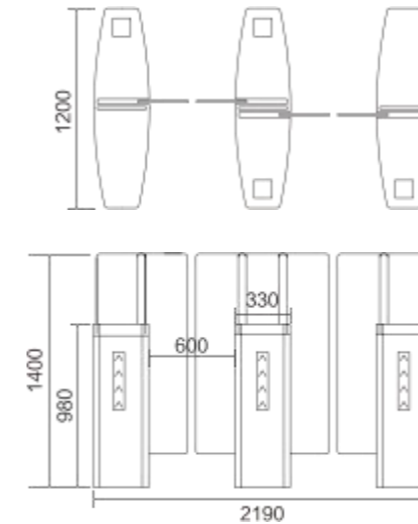

Front View



PYZ003

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*330*980mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Intelligent Embedded System




Face Recognition Fingerprint Recognition Consumer System QR Code Recognition Identity Card Reader




PYZ002

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*330*980mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

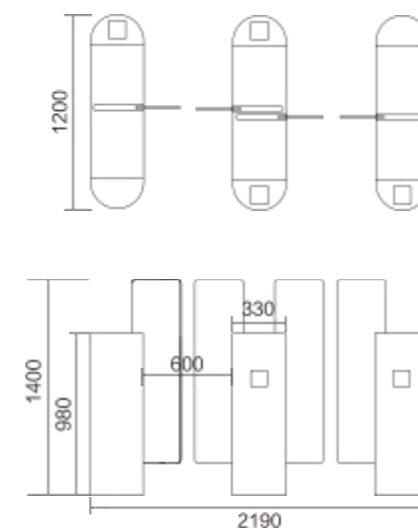

Front View

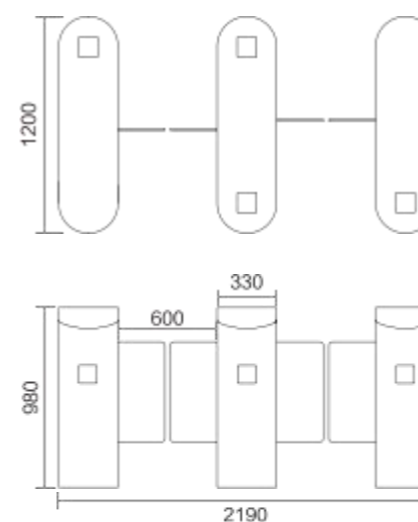

Front View



PYZ004

Chassis Material	SUS304 Stainless Steel
Chassis Size	1200*330*980mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Application Scenarios

- ◆ Subways, stations, docks, tourist attractions, exhibition venues, communities, factories, construction sites, fitness clubs, office buildings, school libraries, entrance and exit control, access control, consumption management, special passage management and control of enterprises and institutions.




PYZ005

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*320*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

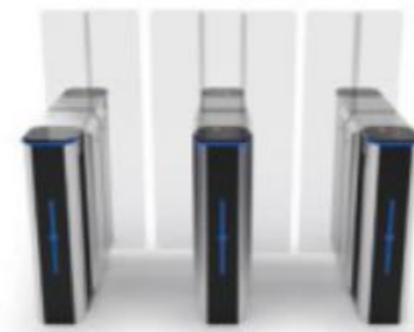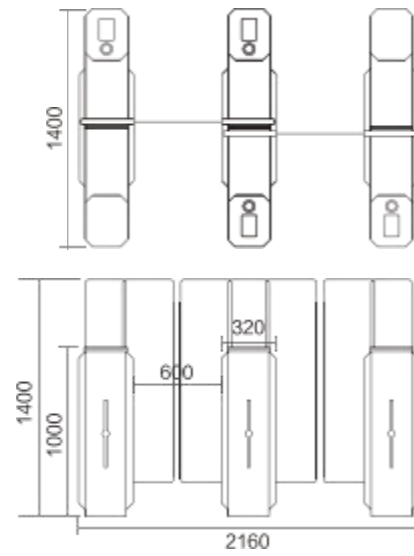

Front View

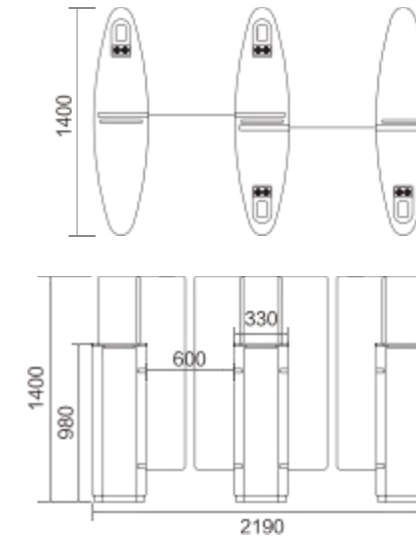

Front View



PYZ008

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*330*980mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Intelligent Embedded System




NOAH ACCESS

Smart Access Control/Smart Community

Supports multi-functional customization such as card swiping, face recognition, code scanning recognition, ticketing system and construction site system .



赛艇世界冠军
黄文仪

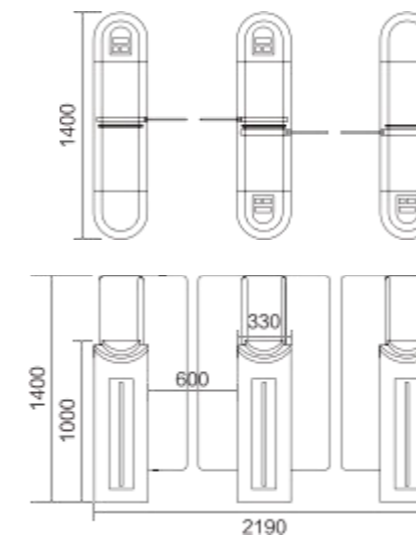

Front View



PYZ018

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*330*1000mm(L*W*H)
Door Wing Material	10mm Plexiglass, Tempered Glass
Passage Width	≤600mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Waist/Full Height Turnstile

Material/thickness/color/size can be customized

Supports multi-functional customization such as card swiping, Face recognition, code scanning recognition, Ticketing system and construction site system .



QGZ011

Functional Characteristics




- ◆ Using a dedicated ARM core microprocessor control circuit and digital positioning technology, the startup and control are smooth and the gate's automatic control capability is more accurate .
- ◆ The system operates smoothly, has low noise, and has a simple and reliable structure .
- ◆ The surface of the movement is treated with anti-rust and anti-corrosion treatment, making it durable .
- ◆ Intelligent voice and sound effect prompts make the device more user-friendly and easier to use .
- ◆ The control panel has a counting function .
- ◆ It can be connected with various equipment such as access control systems, consumer systems, electronic ticket systems, biometric identification systems, and electrostatic testers .
- ◆ The channels will automatically spread out after power off and close automatically when power is turned on .
- ◆ Anti-collision function, the swing arm automatically locks when the gate opening signal is not received.
- ◆ The management computer can be used directly to realize remote control and management .

Intelligent Embedded System



Application Scenarios

Full-height turnstiles are suitable for unattended and high security requirements, as well as some outdoor occasions, such as sports venues, construction sites, prisons, airports , office buildings, factories, scenic spots, stations, etc .

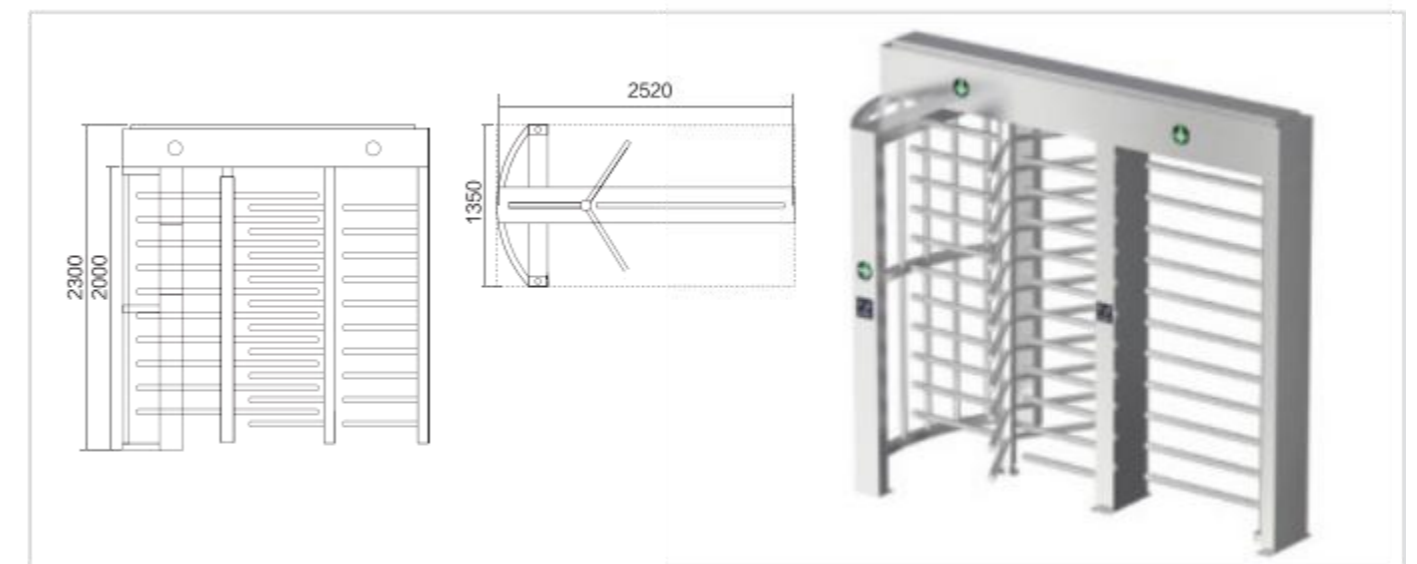

QGZ010





Front View

Chassis Material	SUS304 Stainless Steel
Chassis Size	1350*2520*2300mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C





BGZ001

Chassis Material	SUS304 Stainless Steel
Chassis Size	1350*1500*1200mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Front View



Front View



BGZ003

Chassis Material	SUS304 Stainless Steel
Chassis Size	1500*1500*1200mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

Intelligent Embedded System





Application Scenarios

◆ Full-height turnstiles are suitable for unattended and high security requirements, as well as some outdoor occasions, such as sports venues, construction sites, prisons, airports, office buildings, factories, scenic spots, stations, etc.






BGZ002

Chassis Material	SUS304 Stainless Steel
Chassis Size	1500*2310*1200mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤550mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

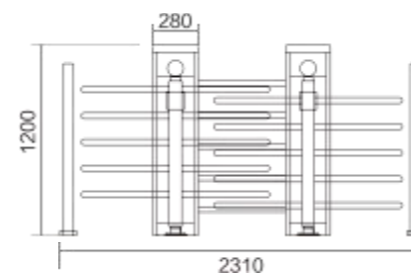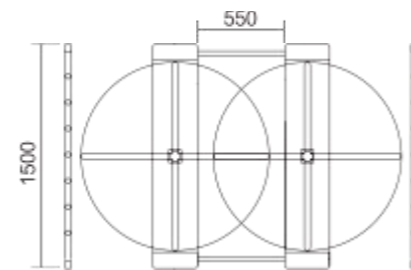



Front View

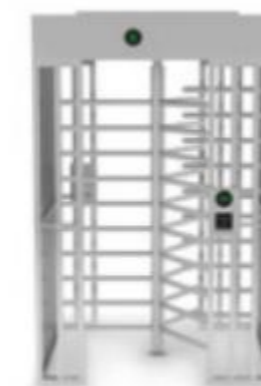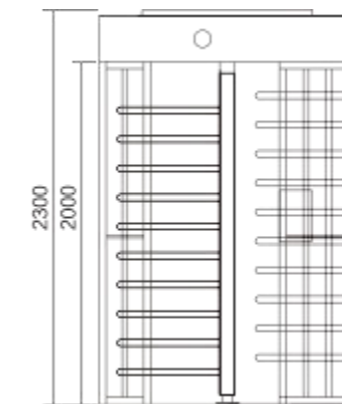

Front View

QGZ009

Chassis Material	SUS304 Stainless Steel
Chassis Size	1450*1500*2300mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

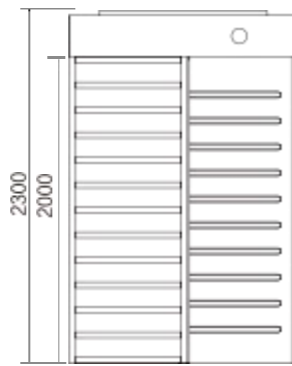



QGZ001D

Chassis Material	SUS304 Stainless Steel
Chassis Size	1450*1500*2300mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Front View

Intelligent Embedded System

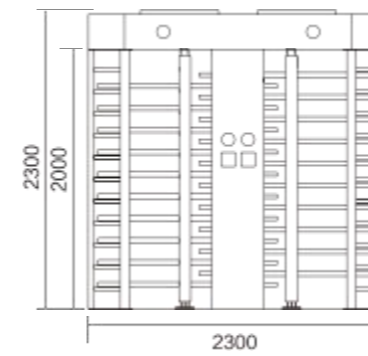

QGZ004S

Chassis Material	SUS304 Stainless Steel
Chassis Size	1450*2300*2300mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Front View





Application Scenarios

◆ Full-height turnstiles are suitable for unattended and high security requirements, as well as some outdoor occasions, such as sports venues, construction sites, prisons, airports, office buildings, factories, scenic spots, stations, etc.





QGZ003S

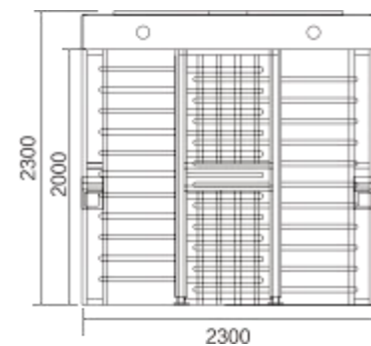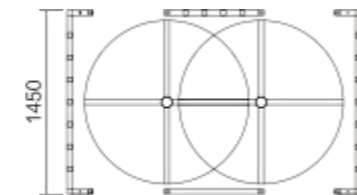

Chassis Material	SUS304 Stainless Steel
Chassis Size	1450*2300*2300mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Front View

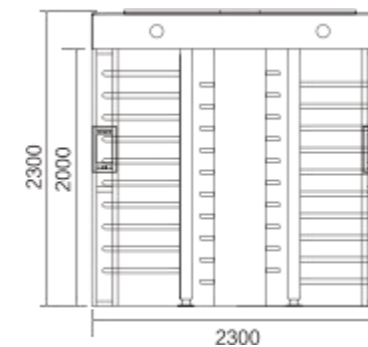

QGZ005S

Chassis Material	SUS304 Stainless Steel
Chassis Size	1450*2300*2300mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C





Front View







QGZ006S

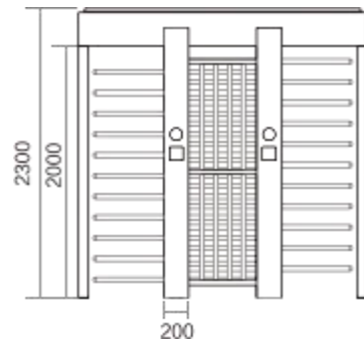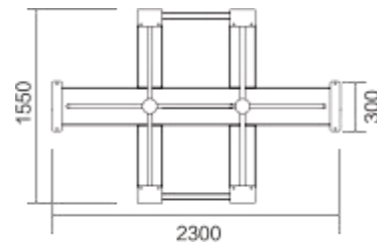

Chassis Material	SUS304 Stainless Steel
Chassis Size	1550*2300*2300mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Front View

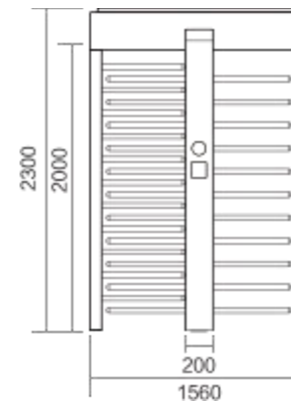

QGZ007D

Chassis Material	SUS304 Stainless Steel
Chassis Size	1550*1560*2300mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C



Front View

Intelligent Embedded System





Application Scenarios


◆ Full-height turnstiles are suitable for unattended and high security requirements, as well as some outdoor occasions, such as sports venues, construction sites, prisons, airports, office buildings, factories, scenic spots, stations, etc.





QGZ007

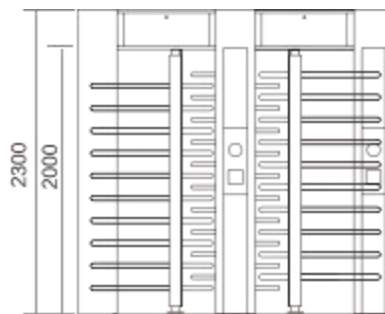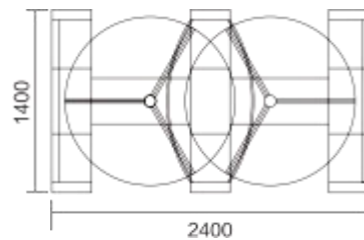

Chassis Material	SUS304 Stainless Steel
Chassis Size	1400*2400*2300mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

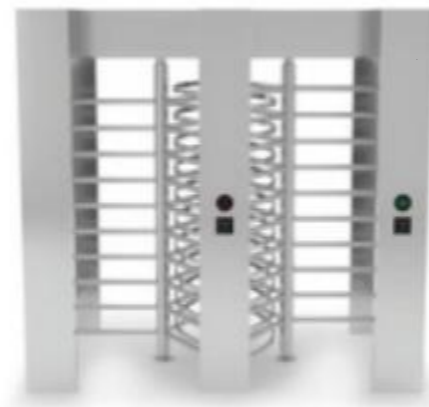


Front View

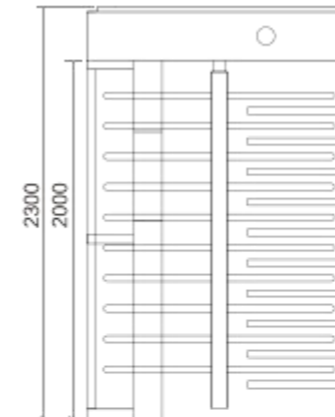

GZ008

Chassis Material	SUS304 Stainless Steel
Chassis Size	1350*1500*2300mm(L*W*H)
Door Wing Material	SUS304 Stainless Steel
Passage Width	≤650mm
Input Voltage	110V~220V,50HZ
Opening Speed	Fastest <0.5 Seconds (User Setting)
Passing Speed	20-60 People/Minute
Usage Environment	Indoor/Outdoor
Ambient Temperature	25°C~70C

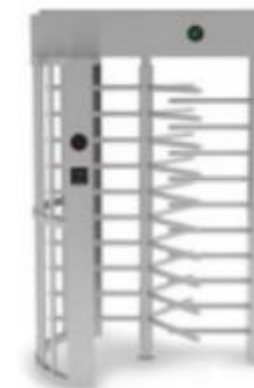

Front View