

Gas Mask



HY-FDQ-06

- Wide field and distortion free vision
- Hard-coat and scratch-resistant PC lens
- Available in EPDM and silicone rubber, optional for fluoridation surface
- RD40 threaded connector



HY-FDQ-07

To have a fresh air breath, Salpasub provides a comprehensive range of powered air and negative pressure respiratory masks in a hazardous environments, offers a flexible air purifying solution with full filter selection to support your various needs.



YOUR SAFETY IS OUR CONCERN

HUD Head Up Display

HUD system provide the new opportunity to help user clearly identify the live pressure status from two units. And also offers the multiple warning functions to remind the user under a safe working condition and alert for an evacuation trigger.

Receiver unit presents the cylinder pressure status with the RED/YELLOW/GREEN LED light indicators be in side mask. When the pressure drop to the pre-set value, it would remind user of evacuation signal through extra vibration.

Transmit unit presents the cylinder pressure value on the LCD digital gauge, as well as temperature, working duration.

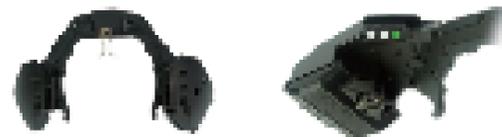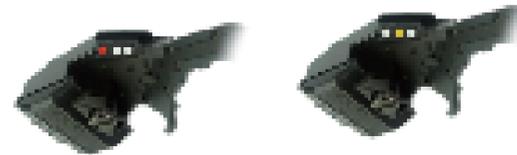

Receiver unit

- Easy to see, bright LED lights for pressure status
- Low battery warning
- Vibration warning under red status

Transmit unit

- Visual aids on the LCD display
- Low battery warning
- Low pressure warning
- Drop-down warning - sounds and flash lighting alarm
- Manual emergency warning




S.A.L.P.A LTD.
Ta' Gidwet Street, Marsascala - Malta

www.salpasub.com E-mail:info@salpasub.com



Full Face Mask SS-BA-9L

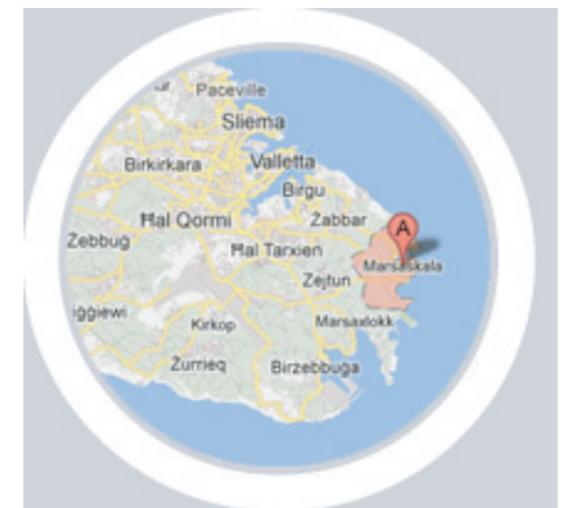

S.A.L.P.A LTD.
Ta' Gidwet Street, Marsascala - Malta

www.salpasub.com E-mail:info@salpasub.com

Full Face Mask

INTRODUCTION

A high quality and stability full face mask guarantees the breathing easier and smoother for people in a hazardous and complex working environment.

Salpasub attempt to attach multifunctional mask to enhance on the work and rescue safety as well as the efficiency.

Salpasub offers the sFP / cFP range mask be approved to EN136:1998+AC:2003 with the CE Directive 89/686/EEC PPE.

As one portion of the communication solution, the communication mask can fully support to avoid any misunderstanding in an emergency with the clear audibility by voice amplifier or radio, even under an extreme conditions.

FUNCTIONS


- Enhances SCBA face piece voice communication intelligibility and loudness.
- Improves user communications from the incident scene to remote locations.
- Ensures operational compatibility with Salpasub SCBA and personal protective equipment.

FEATURES

- Wide field and distortion free vision
- Scratch-resistant and anti-fogging PC lens
- EPDM face piece and nose cup
- Five point Kevlar head harness
- Automatic switch-off
- LED Light
- Voice amplifier
- Battery warning
- Distress signal (sounds and light flash lighting alarm)
- Integrated HUD unit (optional)
- Apply to multiple radio/interphone with cables.



Communication Full Face Mask

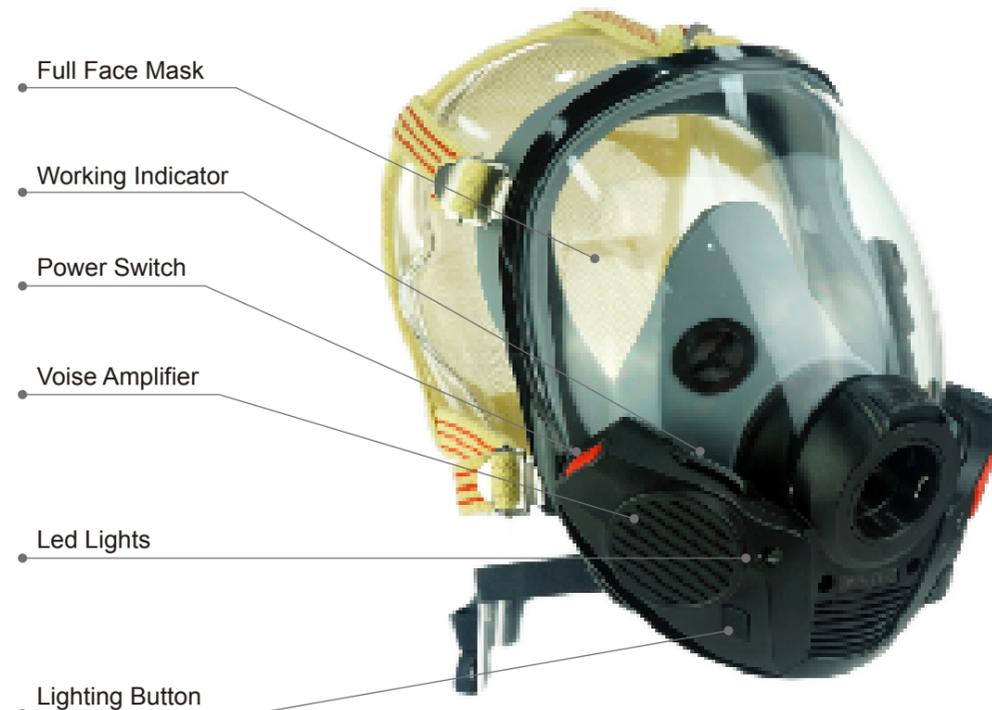

Communication Full Face Mask

Ingress Protection	Ip66 And Ip67
Inhalation Resistance	≤ 500 Pa
Exhalation Resistance	≤ 1000 Pa
Materials	Lens - Pc Facepiece Seal - EPDM Head Harness - Kevlar

Directional Sound Amplifier

Standard Power	1 W
Maximum Output Power	2 W
Frequency Response	300 Hz ~ 3400 Hz
Battery Voltage	Dc 3v
Battery Type	2 - Aaa Battery
Amplified Currency	100 - 500 mA
Standby Currency	≤ 10 mA
Loudspeaker Impedance	8 Ω
Sensitivity	42dB ± 2 dB
Weight	0.24 kg

Directional Sound Amplifier

Operating Temperature	-30? ~ +60?
Storage Temperature	-40? ~ +70?
Working Current	1 mA
Output Impedance	32 Ω
Output Signal Range	50-100 mV
Output Distortion	≤ 5%

Adapter
Note: Standard Brands Appl.
MOTO GP328 GP4000 etc
KENWOOD TK3178 TK3360 etc
VERTEX VX-450 VX 539 etc